
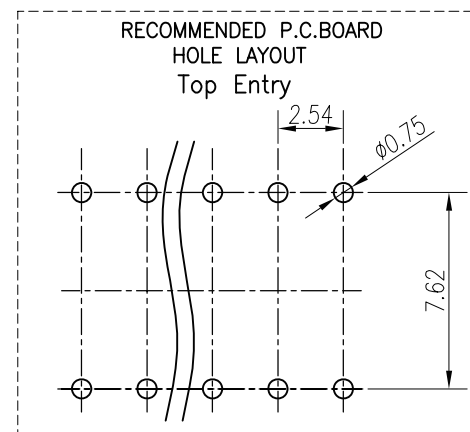
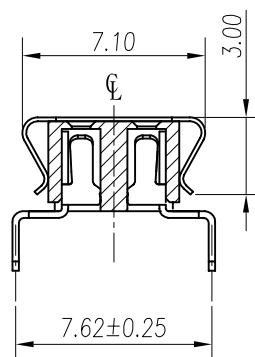
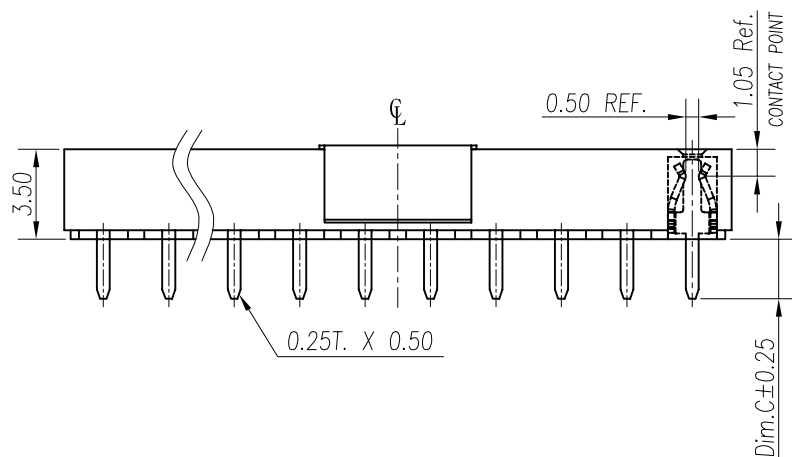


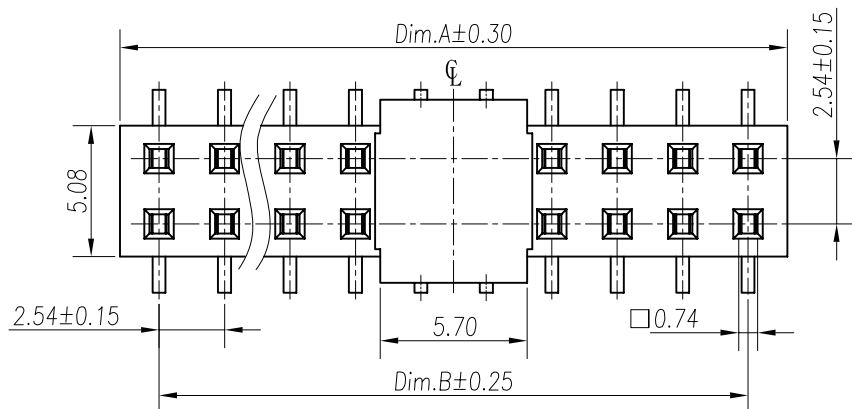

1. Specifications:

- 1.1 Current Rating: 3Amp
- 1.2 Insulation Resistance: 1000MΩ Min.
- 1.3 Dielectric Withstanding: 600V AC/DC
- 1.4 Contact Resistance: 20mΩ Max.
- 1.5 Operating Temperature: -40°C to +105°C

2. Materials:

- 2.1 Contact Material: Phosphor Bronze
- 2.2 Insulation Material: Polyester, UL 94V-0
 - B=02~40pins use Nylon6T Black
 - C=02~40pins use LCP Black
- 2.3 All materials must be GP materials

TABLE 2

No. of PIN/ROW	Dimension Information	
	Dim.A	Dim.B
02	5.58	2.54
03	8.12	5.08
04	10.66	7.62
05	13.20	10.16
06	15.74	12.70
07	18.28	15.24
08	20.82	17.78
09	23.36	20.32
10	25.90	22.86
11	28.44	25.40
12	30.98	27.94
13	33.52	30.48
14	36.06	33.02
15	38.60	35.56
16	41.14	38.10
17	43.68	40.64
18	46.22	43.18
19	48.76	45.72
20	51.30	48.26
21	53.84	50.80
22	56.38	53.34
23	58.92	55.88
24	61.46	58.42
25	64.00	60.96
26	66.54	63.50
27	69.08	66.04
28	71.62	68.58
29	74.16	71.12
30	76.70	73.66
31	79.24	76.20
32	81.78	78.74
33	84.32	81.28
34	86.86	83.82
35	89.40	86.36
36	91.94	88.90
37	94.48	91.44
38	97.02	93.98
39	99.56	96.52
40	102.10	99.06

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

F-D35R76C-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
DIP 180° CAP ROW FOOT 7.62mm
HIGH 3.5mm

DESCRIPTION: 2.54 Female Header Dual Rows DIP Type Connector