
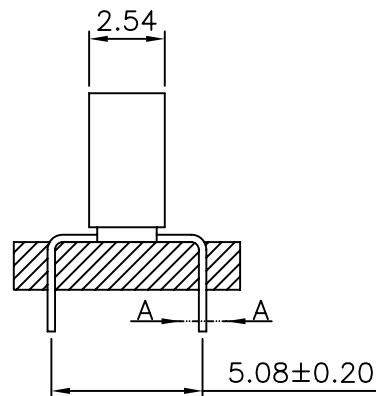
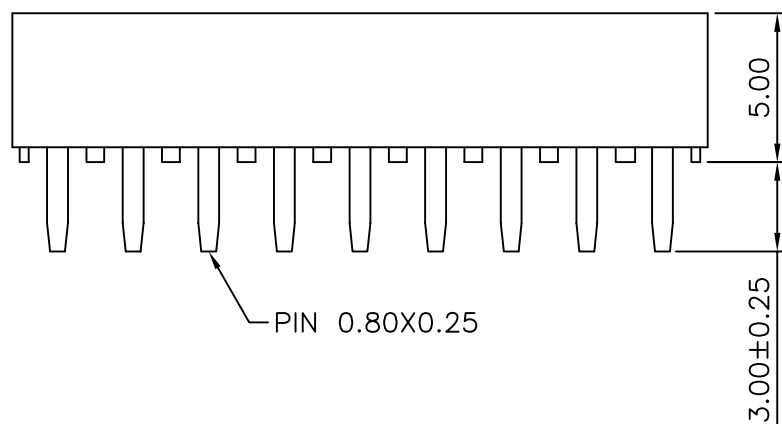
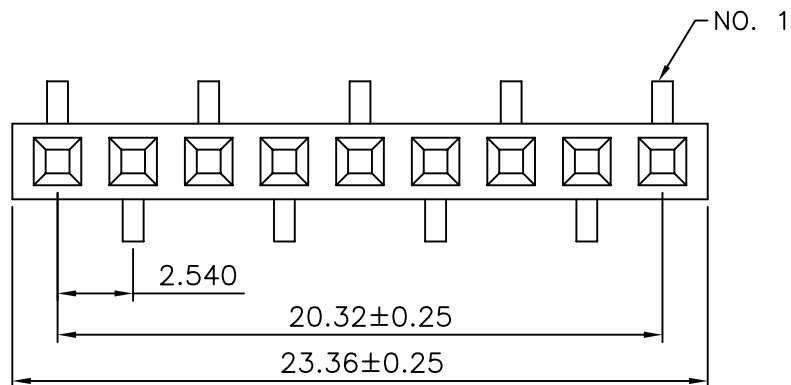


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 P.B.T

Recommended P.C.Board
 Hole Layout

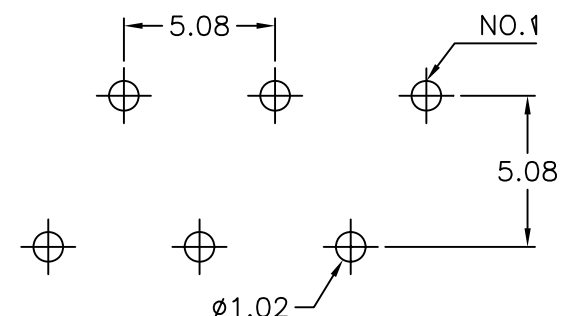

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-D50-1XxxL-LF
 SERIES L TYPE FOOT
 DIP 180°
 1X02:02 WAY
 1X40:40 WAY
 HIGH 5.0mm

DESCRIPTION: 2.54 FEMALE HADER SINGLE ROW DIP TYPE BASE 5.00H