





(No. of Positions Per Row)*2.54+0.40±0.30

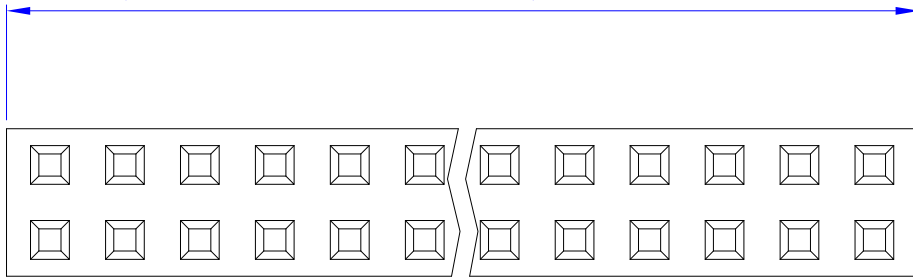

(No. of Positions Per Row-1)*2.54

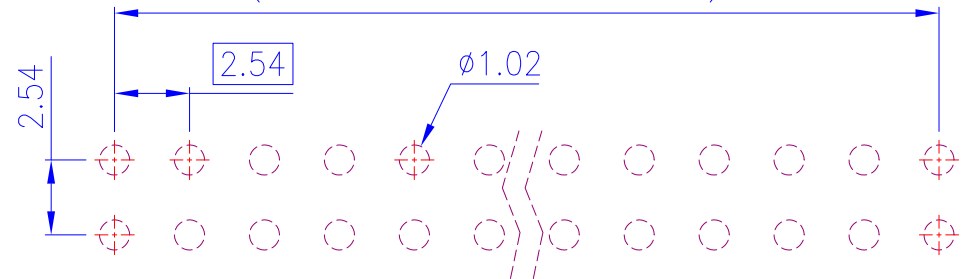

PCB Layout
(Top View)

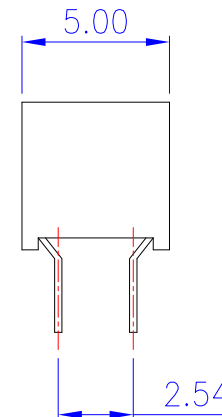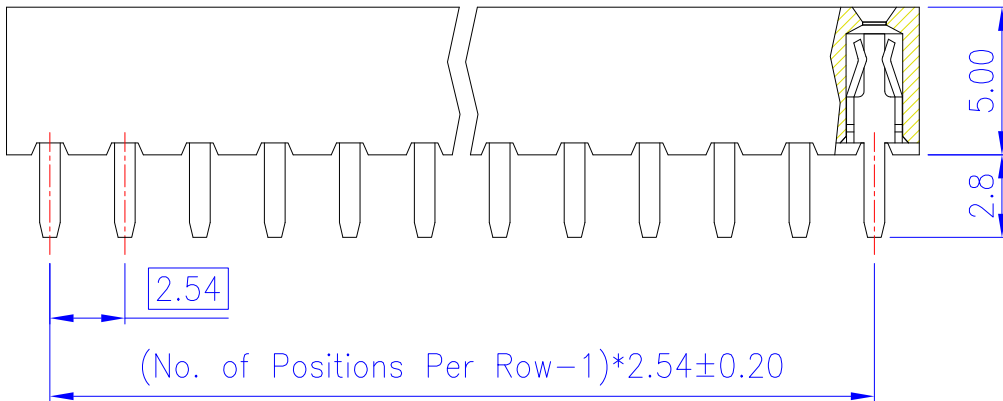

Material and Finish

1. Housing: Nylon 6T (UL94V-0), Black.
2. Terminal: Copper Alloy (t=0.25mm), Gold Plating.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 1000V DC.
4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

F-D50-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
HIGH 5.0mm
DIP 180°

DESCRIPTION: 2.54mm Post Header Receptacle PCB Mount Vertical Type Dual Rows