

SPECIFICATIONS

Material

Insulator: PBT, glass reinforced, rated UL 94V-0

Contact: Phosphor Bronze

Electrical

Current Rating: 1 Amp





Contact Resistance: 30 mΩ max.

Insulation Resistance: 3000 MΩ min.

Dielectric Withstanding Voltage: 500V AC for 1 minute

Operating Temperature: -40°C to +105°C

Mating Suggestion: C15, C16, C17 & C18 series.

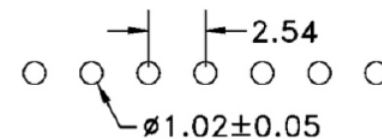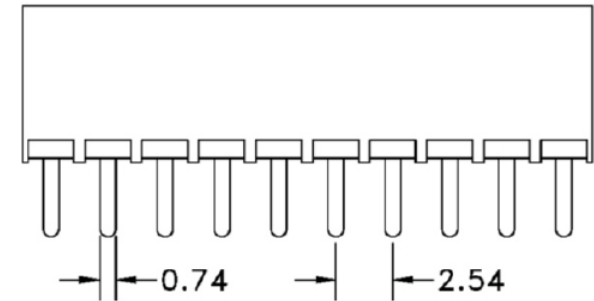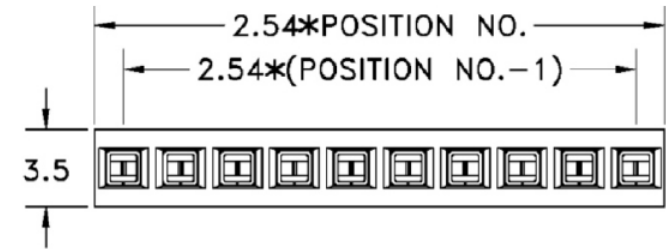

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

F-D66-1Xxx-LF
SERIES
LEADFREE
1X02:02 WAY
1X40:40 WAY
HIGH 6.6mm
DIP 180°

DESCRIPTION: