

P.C.B. LAYOUT

Technical Data

Material:

Contact Material: Phosphor Bronze

Insulator Material: Black Polyester UL94V-0

Standard: PBT or PA6T+30%G.F

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Withstanding Voltage: 1000V AC/minute

Mechanical:

Operating temperatures: Gold Plated: -55°C to $+105^{\circ}\text{C}$

Tin plated: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+220^{\circ}\text{C}$ 10s max(PBT).

$+260^{\circ}\text{C}$ 10s max(PA6T).

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50


.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm 5^{\circ}$

ORDER INFORMATION

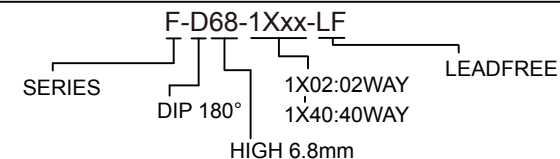

DESCRIPTION: PH 2.54 H6.8mm Single Row Straight Female Header