

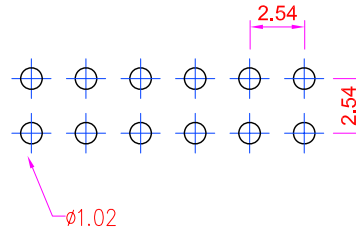


Recommended P.C. Board Hole Layout



Specifications

Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0 P.B.T.
 Contact Plated : See Option
 Standard: Full Gold Flash

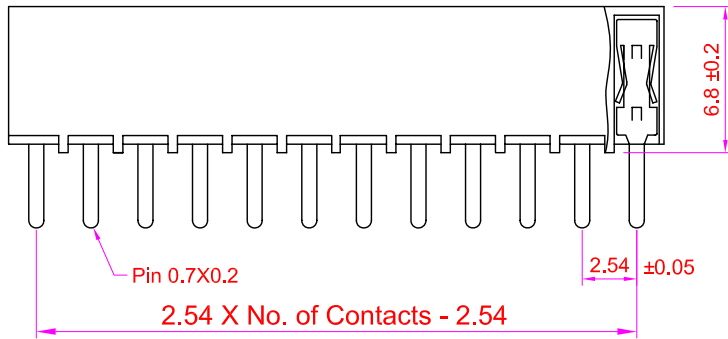

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.20

.XX ± 0.10

.XXX \pm

ANG \pm

PPOJECTION

照片框

ORDER INFORMATION

F-D68-2Xxx-LF
 SERIES | LEADFREE
 2X02:04WAY
 2X40:80WAY
 HIGH 6.8mm
 DIP 180°

DESCRIPTION: Female Header P2.54mm Profile : 6.8mm, Dual Row, Straight Type