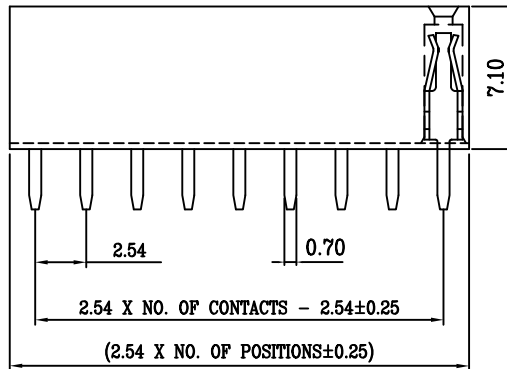



SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 5000M OHMS MIN.

DIELECTRIC WITHSTANDING: 1000V AC/DC

CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: -40°C ~ +103°C

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

F-D71G30-2Xxx-LF
SERIES
LEADFREE
2X03:06 WAY
2X40:80 WAY
FULL GOLD 30u"
HIGH 7.1mm
DIP 180°

DESCRIPTION: 2.54mm Female Socket Dual Row DIP type (H=7.1)