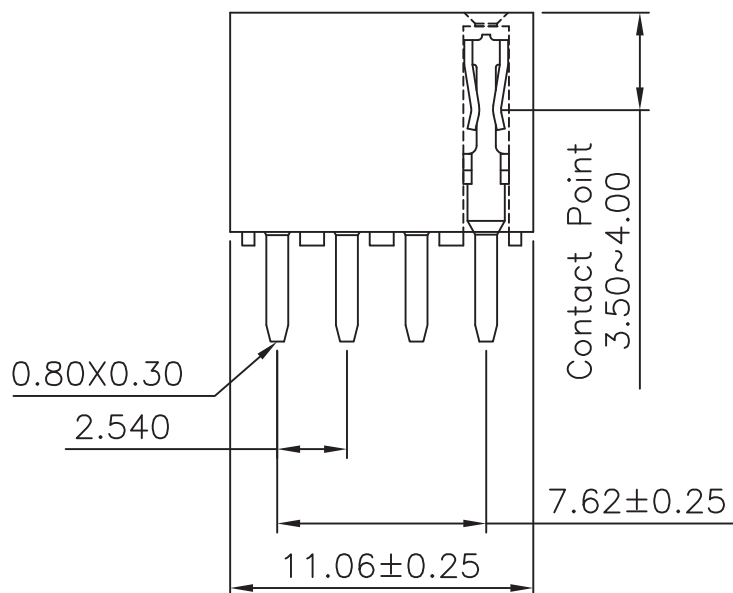



Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC/DC

Contact Resistance: 20mΩ Max.


Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
P.B.T

Recommended P.C.Board Hole Layout



RoHS Compliant

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-D85-1X04-LF
SERIES | HIGH 8.5mm | 04 WAY | LEADFREE
DIP 180°

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW DIP TYPE BASE 8.5H