
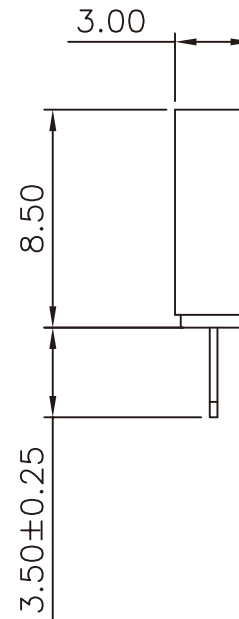
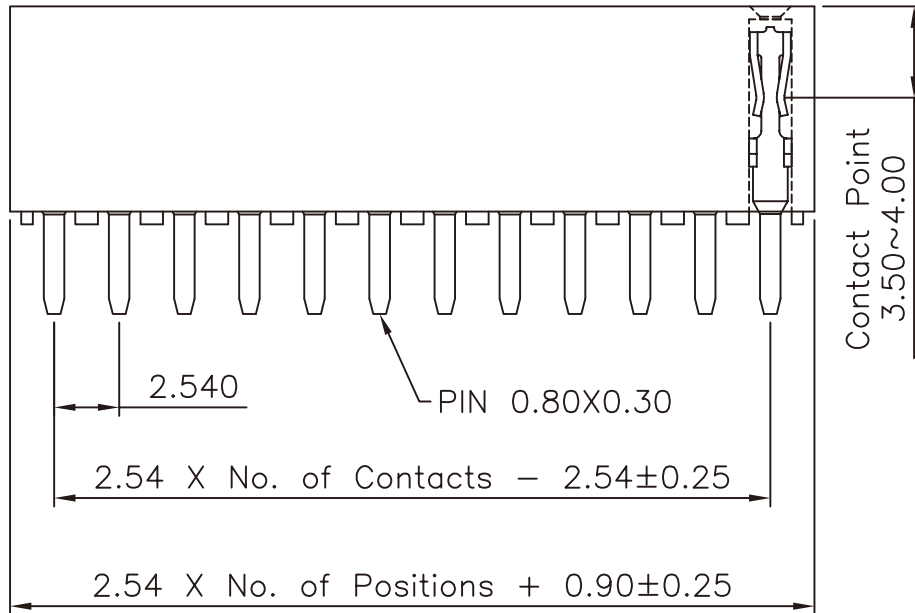


### Specifications


Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

### Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 P.B.T



### Recommended P.C.Board Hole Layout



**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE

SIZE A4

P PROJECTION

X, ±  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ± 0.13  
 ANG ±



### ORDER INFORMATION

F-D85-1Xxx-LF  
 SERIES | LEADFREE  
 1X02:02WAY  
 1X40:40WAY  
 HIGH 8.5mm  
 DIP 180°

DESCRIPTION: 2.54 FEMALE HEADER TRIPLE ROWS DIP TYPE BASE 8.50H