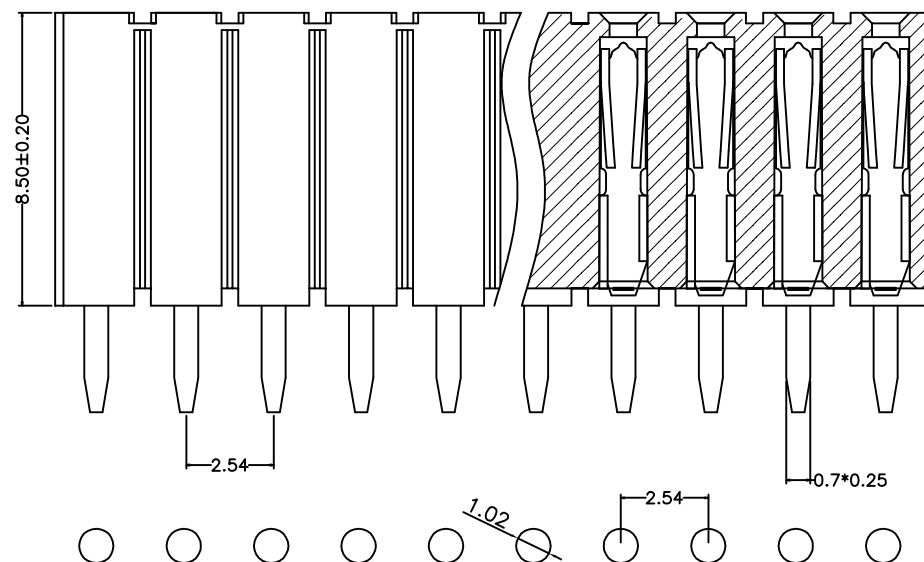
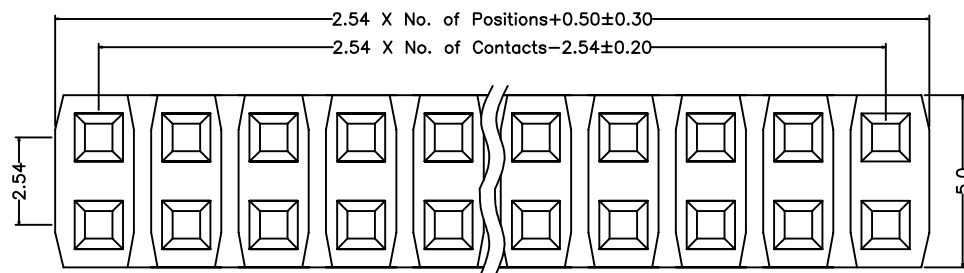


P.C.B LAYOUT

Technical Data

Material:

Contact Material: Brass (C2680)

Contact plating: Au or Sn Over 50μ" Ni

Insulator Material: Polyester UL94V-0
PBT +30%G.F

Electrical:

Current rating: 3.0Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage: 1000V AC/minute

Mechanical:

Operating temperatures:

Gold Plated: -55°C to +105°C

Tin plated: -40°C to +105°C

Soldering temperature: +220°C, 10s max

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

F-D85B-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X40:80WAY
DIP 180° BREAKAWAY
HIGH 8.5mm

DESCRIPTION: 2.54mm雙排排母-U型PIN 180度 針長11.5mm