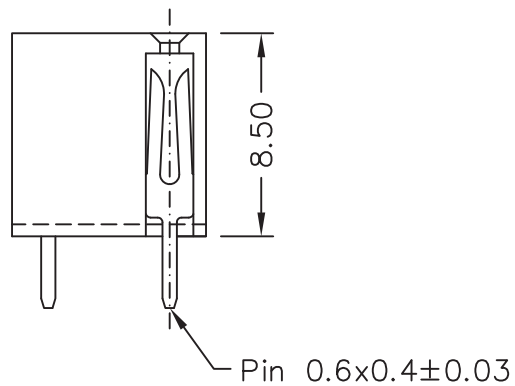
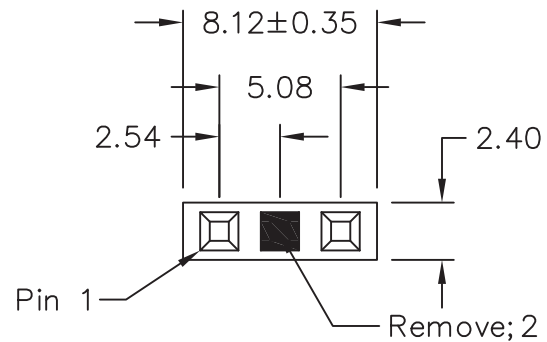


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass


SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

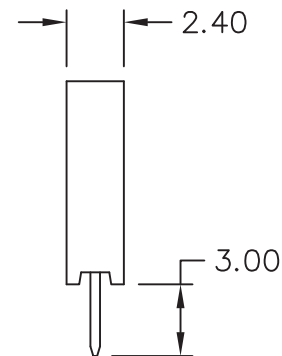

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PROJECTION

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

ORDER INFORMATION

F-DEE-1X03-LF
SERIES | 03WAY | LEADFREE
EMPTY #2
DIP 180°

DESCRIPTION: FEMALE HEADER 2.54*2.54mm
STRAIGHT TYPE, SINGLE ROW HEIGHT 8.5mm,