
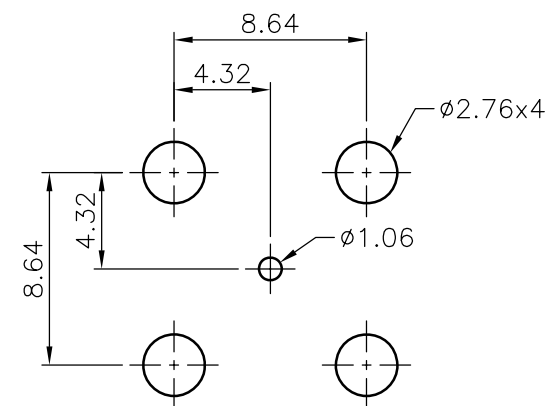
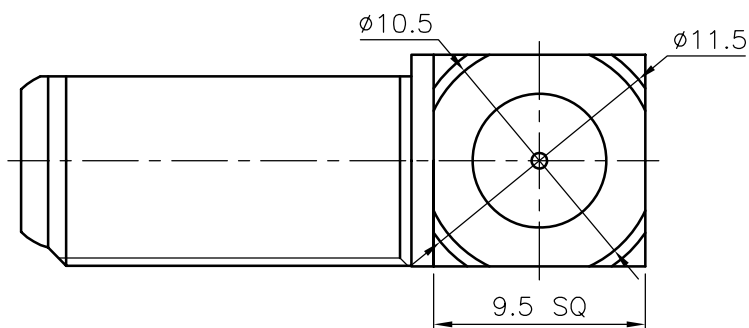


RECOMMENDED
MOUNTING HOLE
(建議架設孔)

	CONTACT PIN	BRASS	TIN	
	INSULATOR	P.P	WHITE	
	BODY	BRASS	NICKEL	
	CUBE BODY	BRASS	NICKEL	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY

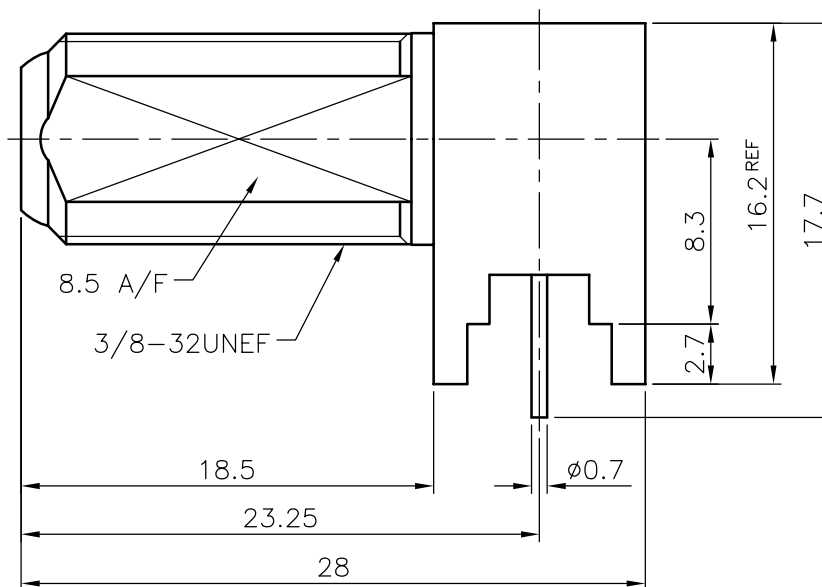

P.C.B. LAYOUT
(印刷電路板配置)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

F-JRL28-75-LF

SERIES
LEADFREE
75 OHM
LONG 28.0mm
DIP 90°
JACK

DESCRIPTION: F R/A PCB MOUNT JACK