




$\phi 1.2 \times 1$
 $\phi 2.8 \times 4$
 PCB MOUNTING HOLE

★ Lead soldering Temperature
 260° for 5 Seconds.

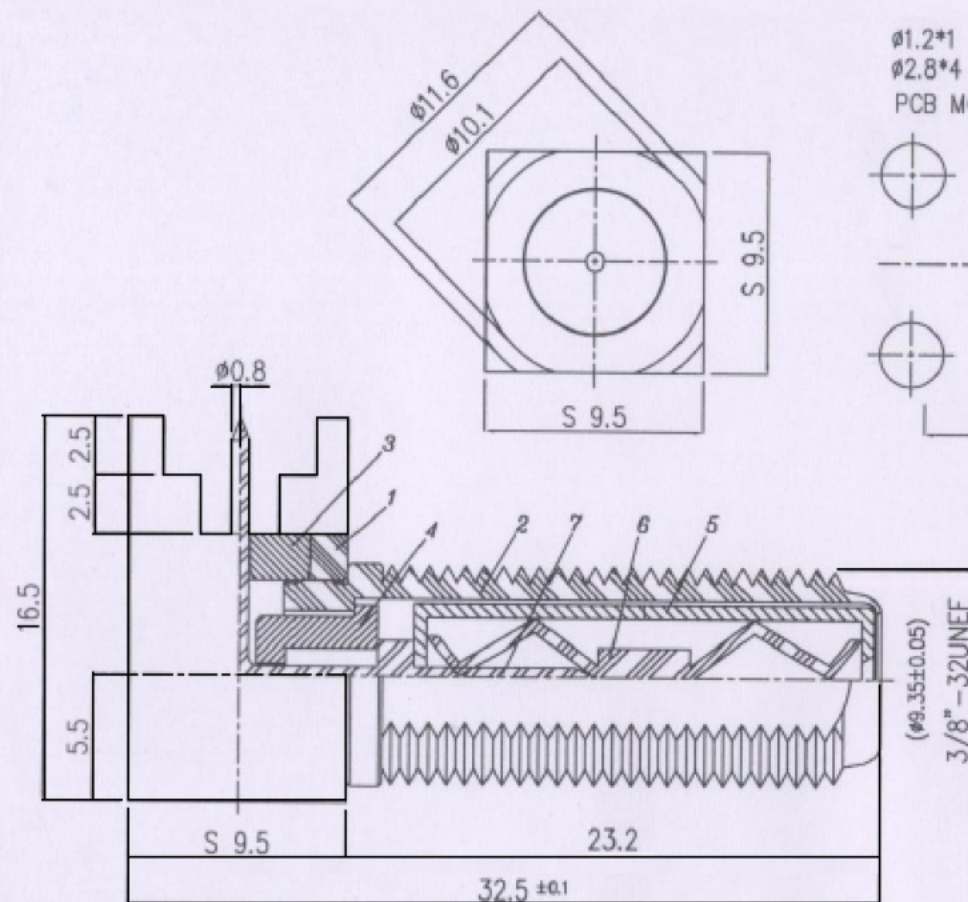

NO	DESCRIPTION	Q'TY	ITEM NO.	MATERIAL	PLATING
1	BODY 1	1	F-P225-ROHS	BRASS	NICKEL 100μ" MIN.
2	BODY 2	1	F-P225-ROHS	BRASS	NICKEL 100μ" MIN.
3	DIELECTRIC 1	1	D-060005	DELTRIN	-
4	DIELECTRIC 2	1	D-060004	DELTRIN	-
5	DIELECTRIC 3	1	P-060005	P.P	-
6	CENTER PIN 1	1	P-060005	BRASS	TIN 100μ" MIN.
7	CENTER PIN 2	1	F-P225-ROHS	BRASS	NICKEL 100μ" MIN.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX ± 0.10

DATE

ANG ± 1°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

F-JRL32RF-75-LF

SERIES
 LEADFREE
 75 OHM
 ROUND FLAT
 LONG 32.5mm
 DIP 90°
 JACK

DESCRIPTION: