


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials

Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon (無鹵) or the equivalent material

Recommended P.C.Board Layout
 (Tolerance: ±0.05)

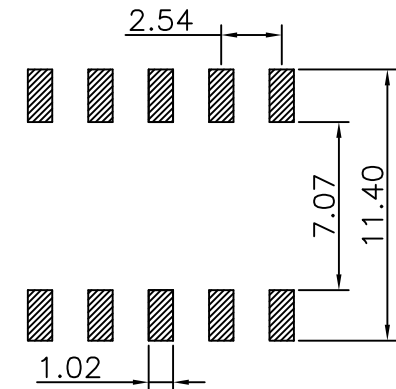

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X. ± 0.30
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±

P PROJECTION



ORDER INFORMATION

F-MX-1Xxx-LF
 SERIES | LEADFREE
 | 1X02:02WAY
 | 1X40:40WAY
 | NON POST
 | SIDE ENTRY SMT

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW SMT TYPE SIDE ENTRY