
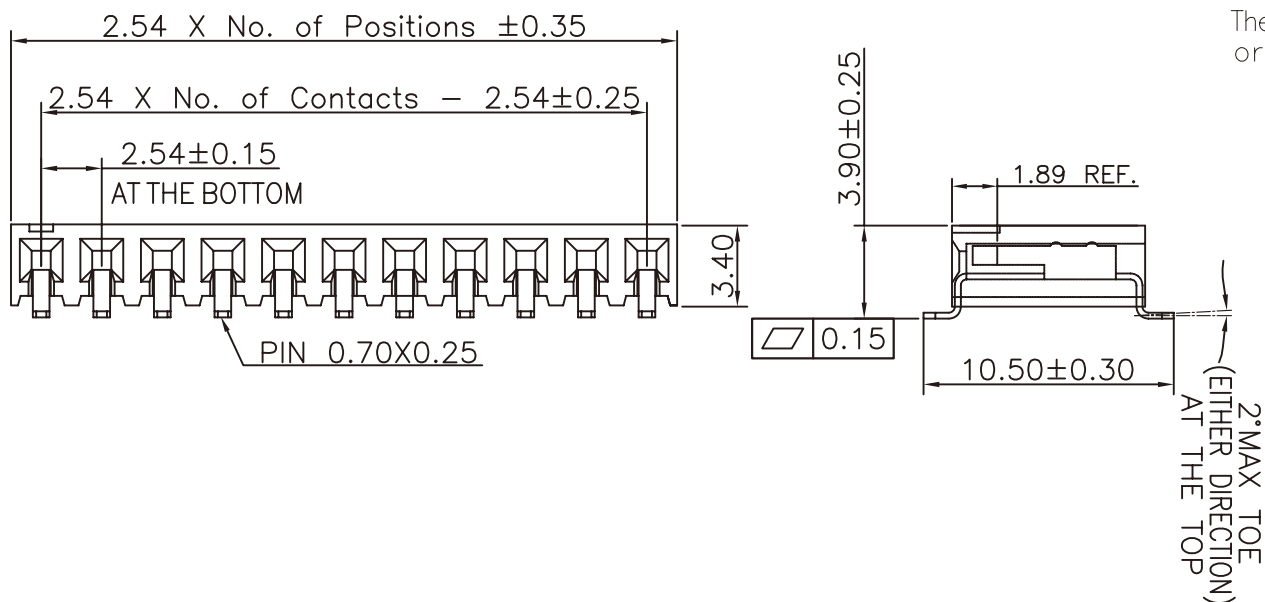


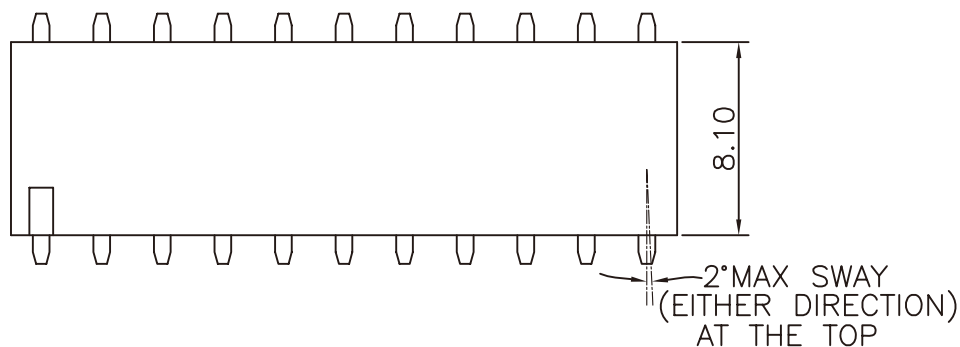

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding Voltage: 600VAC

Contact Resistance: 20m Ω Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulator Material: High Temperature

Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free)
or the equivalent material

Recommended P.C.Board
Layout
(Tolerance: ± 0.05)

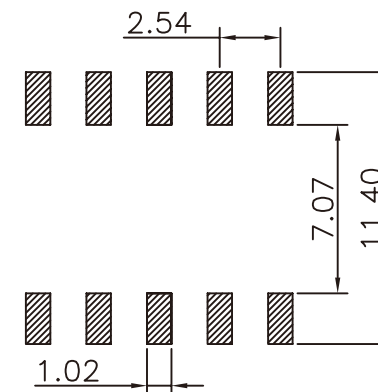

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG $\pm$

P PROJECTION

照片框

ORDER INFORMATION

F-MXR-1Xxx-LF

SERIES

LEADFREE

1X02:02WAY



1X40:40WAY

REEL


NON POST

SIDE ENTRY SMT

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW SMT TYPE SIDE ENTRY

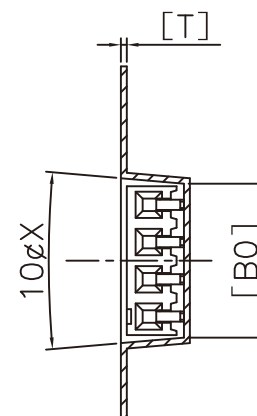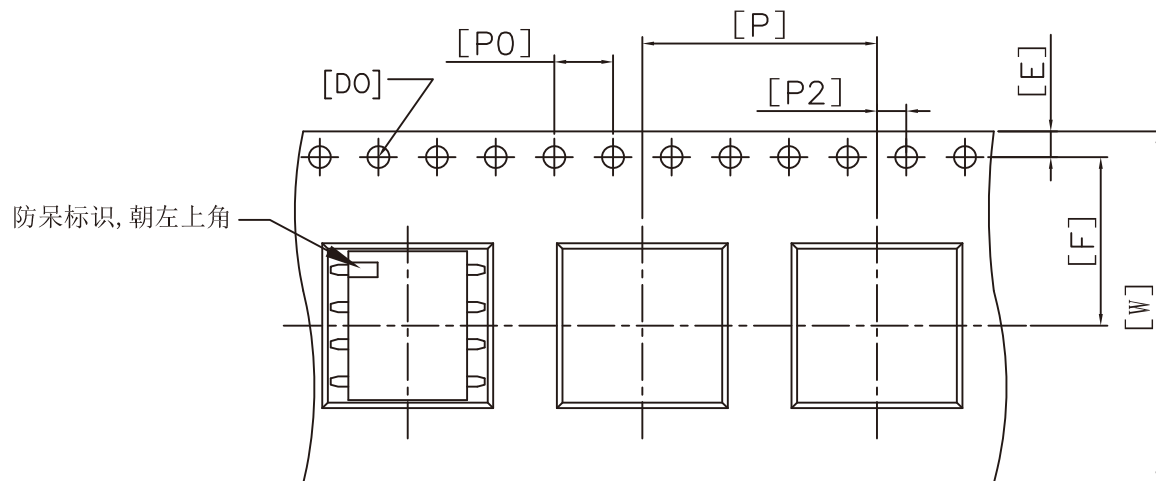

10 Reels/box

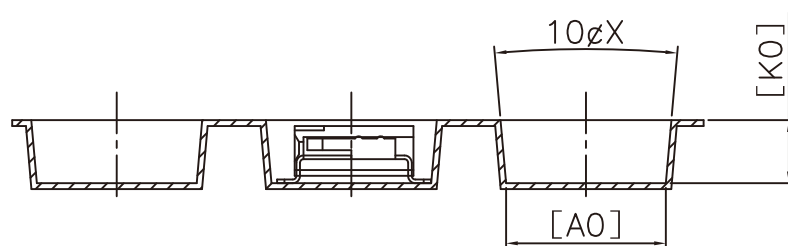

Notes:

1. Packing Conforms EIA-481-B Standards.
2. 10 sprocket hole pitch cumulative
3. Carrier camber is within 1mm in 250mm.
4. Material: BLACK Polystyrene.
5. Packing length per 13" Reel: 15.4 Meters.
6. Component load per 13" Reel: 900 PCS.
7. All materials must meet Greenconn requirement for environment protection

W	24.00 ^{+0.30} _{-0.30}	T	0.40±0.05	Po	4.00±0.10	Ao	10.90±0.15
		F	11.50±0.10	P2	2.00±0.10	Bo	10.50±0.15
E	1.75±0.10	P	16.00±0.10	Do	ø1.50 ±0.10	Ko	4.30±0.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-MXR-1Xxx-LF
SERIES
LEADFREE
1X02:02WAY
1X40:40WAY
REEL
NON POST
SIDE ENTRY SMT

DESCRIPTION: