

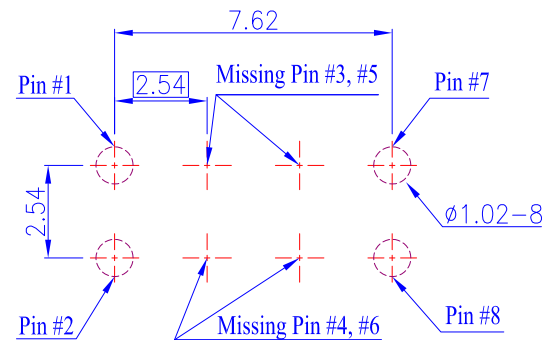
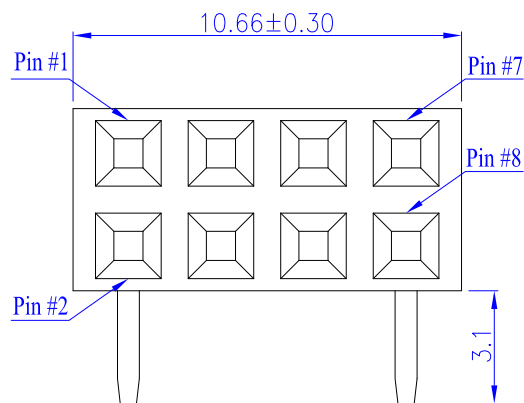


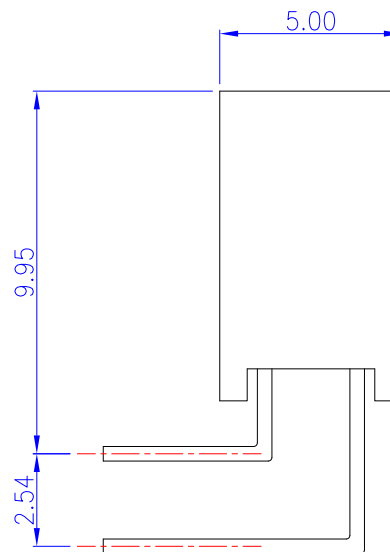

PCB Layout
(Top View)

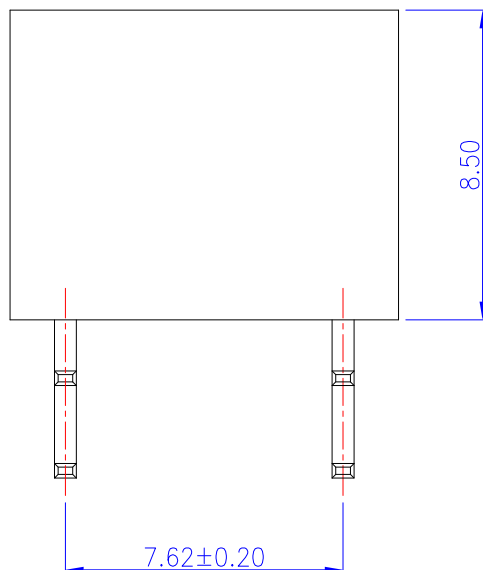

Material and Finish

1. Housing: PBT (UL94V-0), Black.
2. Terminal: Brass ($t=0.40$ mm), Gold Plating.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 1000V DC.
4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

1. Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

F-R-2X04EM-LF
SERIES LEADFREE
EMPTY#3.4.5.6
18 WAY
DIP 180°

DESCRIPTION: 2.54mm Post Header Receptacle PCB Mount Right Angle Dual Rows 8P, Missing Pin #3, #4, #5, #6