
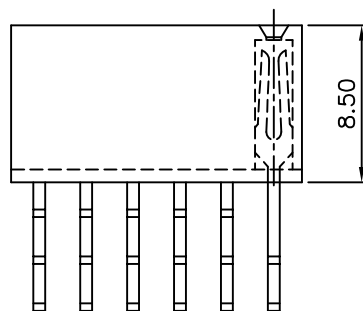
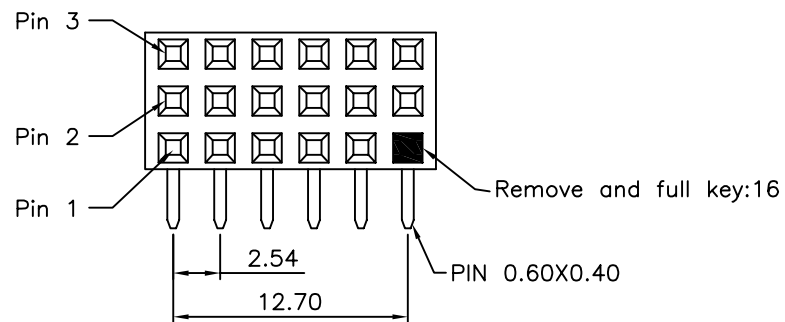


Recommended P.C.B Layout

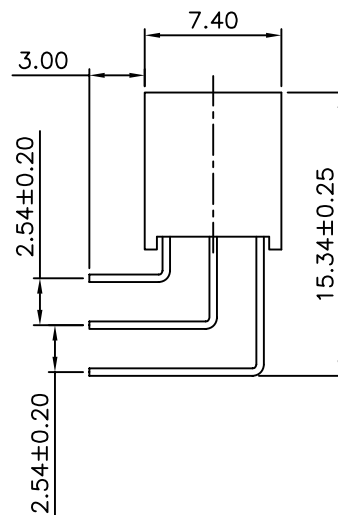

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 NYLON-6T

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

F-R-3X06E16-LF
 SERIES | LEADFREE
 18 WAY
 DIP 90°

DESCRIPTION: FEMALE HEADER 2.54*2.54mm RIGHT ANGLE TYPE, TRIPLE ROWS HEIGHT 8.5mm