

Specifications


Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0

△注: 02~24PIN塑膠材質用P. B. T料生產,
 25~40PIN塑膠材質用PA6T+20 %料生產.

Recommended P.C.Board

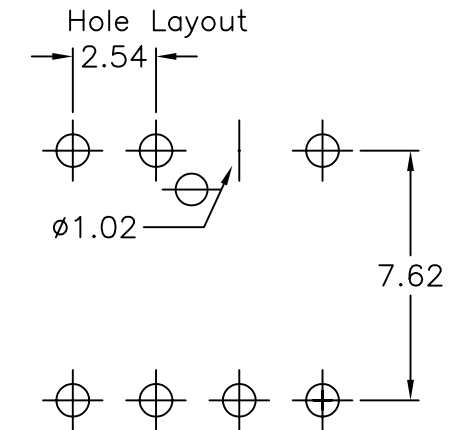

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

F-S-1X02-LF
 SERIES | LEADFREE
 | 02WAY
 | SIDE ENTRY

DESCRIPTION: 2.54 FEMALE HEADER DUAL ROWS DIP TYPE SIDE ENTRY