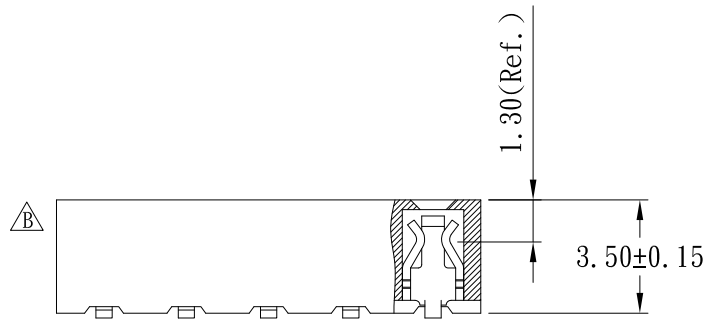
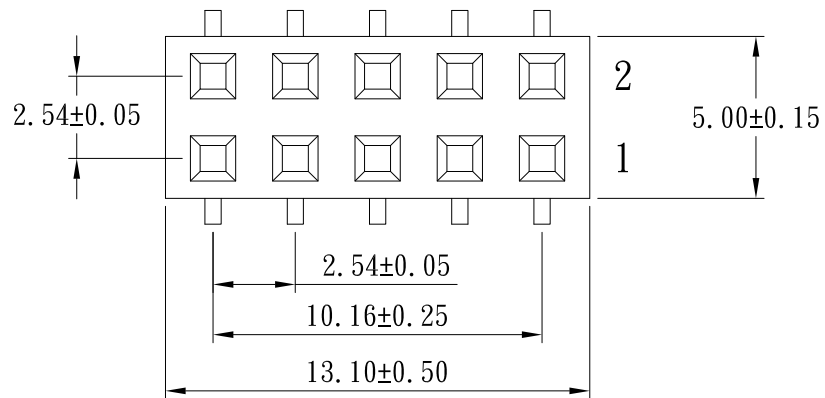


SPECIFICATIONS

Current Rating:

3 Amp

Voltage Rating:

250V

Insulator resistance:

5000 Megohms Min. $\triangle C$

Contact Resistance:

20 m ohms Max.

Dielectric withstanding:

AC 500V/minute

Operating Temperature:

$-40^{\circ} \sim +105^{\circ}C$

Contact Material:

Phosphor Bronze

Insulator Material:

High Temperature Thermoplastic

+Glass Fibre UL94V-0

Standard Color: Black

Finish:

Gold, Tin or Duplex plated

Duplex plated:

Gold plated on contact area

Tin on solder area

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION $\oplus$

X, $\pm$
.X ± 0.38
.XX ± 0.25
.XXX $\pm$
ANG $\pm 3^{\circ}$

照片框

ORDER INFORMATION

F-V36X-2Xxx-LF
SERIES | LEADFREE
180°SMT | 2X02:04WAY
NON POST | 2X40:80WAY
HIGH 3.6mm

DESCRIPTION: