

Recommended P.C. Board SMD Layout

Specifications

Current Rating : 3 Amps

Insulator Resistance : 1000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 600V





Operating Temperature : -40°C ~ +105°C

Contact Material : Phosphor Bronze

Insulator Material : Polyester, UL 94V-0 Nylon-6T

Contact Plated : See Option

Standard: Full Gold Flash

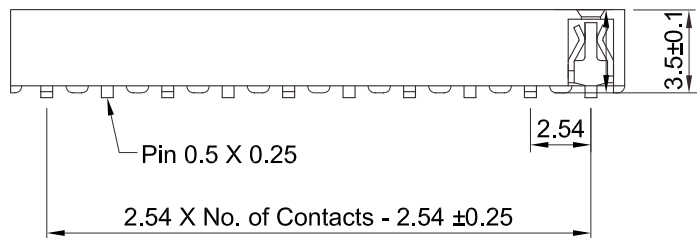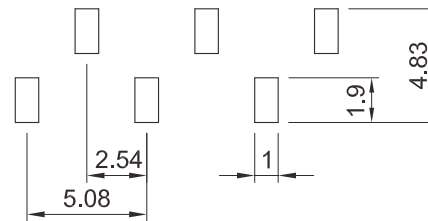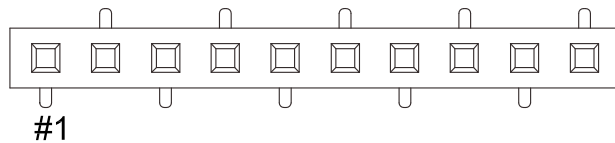

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-V37X-1XxxL-LF
SERIES | | | LEADFREE
180°SMT | | L TYPE FOOT
2X02:04WAY
2X40:80WAY
NON POST
HIGH 3.7mm

DESCRIPTION: Female Header P2.54mm Profile : 3.5mm, Single Row, SMD Type