

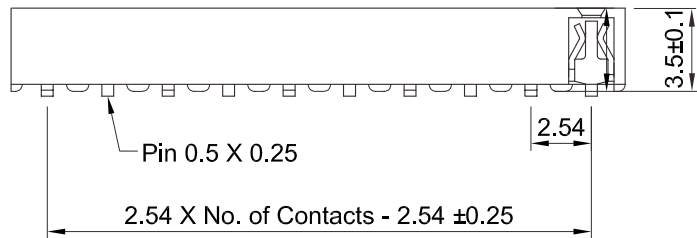
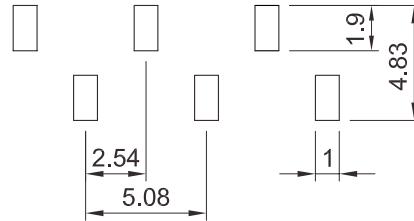


**Recommended  
P.C. Board SMD Layout**

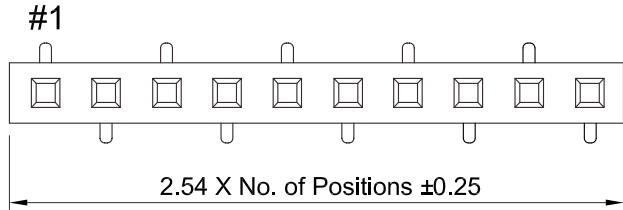

**Specifications**

Current Rating : 3 Amps  
 Insulator Resistance : 1000 Megohms min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 600V  
 Operating Temperature :  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Contact Material : Phosphor Bronze  
 Insulator Material : Polyester, UL 94V-0 Nylon-6T  
 Contact Plated : See Option  
 Standard: Full Gold Flash

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$

.X,  $\pm$

.XX,  $\pm$

.XXX,  $\pm$

ANG,  $\pm$

PJECTION

照片框

**ORDER INFORMATION**

F-V37X-1XxxR-LF

SERIES | | | LEADFREE  
 | | | R TYPE FOOT  
 | | | 1X02:02WAY  
 | | | 1X40:40WAY  
 180°SMT | NON POST  
 HIGH 3.7mm

DESCRIPTION: Female Header P2.54mm Profile : 3.5mm, Single Row, SMD Type