
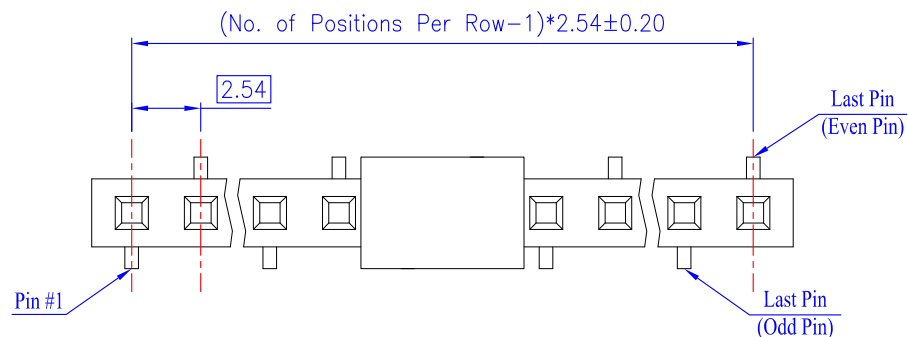


Type A

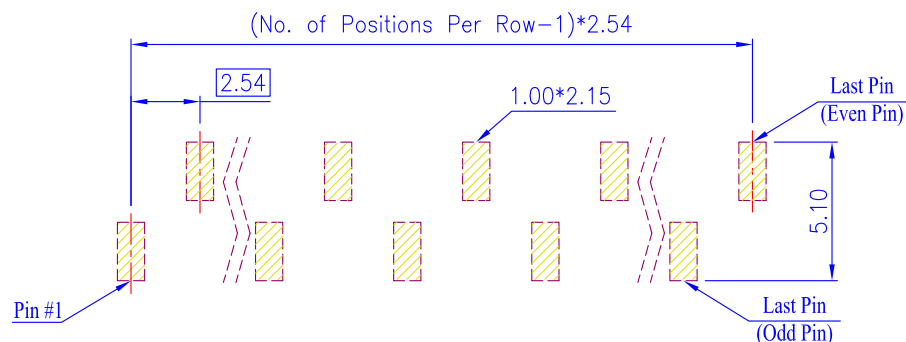

Material and Finish

1. Housing: Nylon 6T (UL94V-0), Black.
2. Terminal: Phosphor Bronze ($t=0.25\text{mm}$), Gold Plating.
3. Cap: Nylon 6T, Black.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.
4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

1. Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

F-V37XC-1XxxL-LF
SERIES | 180°SMT | HIGH 3.7mm | CAP | NON POST | LEADFREE | L TYPE FOOT | 1X02:02WAY | 1X40:40WAY

DESCRIPTION: 2.54mm Post Header Receptacle PCB Surface Mount Type without Post, Single Row (H=3.50mm) (Tube Package with Cap)