
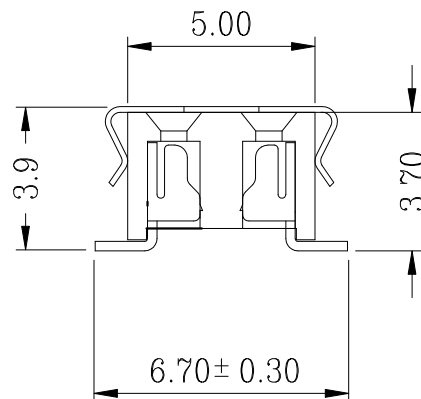
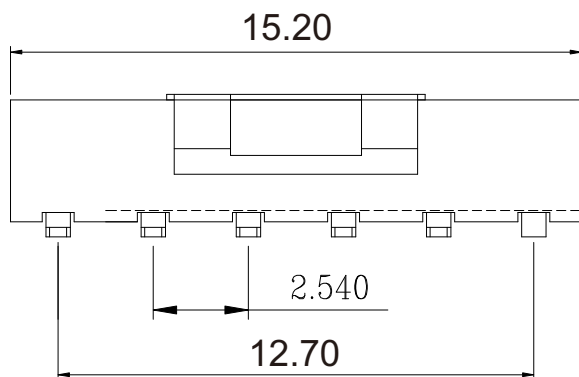


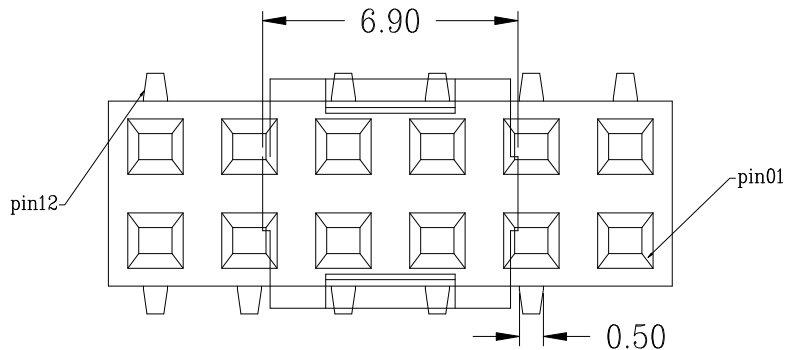

SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC


CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

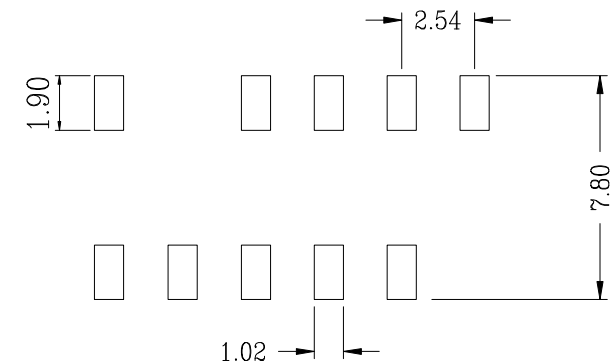

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.35

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.05

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

F-V37XC-2X06E110-LF

SERIES 180°SMT
CAP NON POST
12WAY HIGH 3.7mm
LEADFREE
EMPTY#1.10

DESCRIPTION: 2.54mm Female Socket Dual Row SMD type (H=3.7)