

Recommended P.C. Board Layout
(Tolerance: ± 0.05)


1. Specifications

- 1.1 Current Rating: 3Amp
- 1.2 Insulation Resistance: $1000M\Omega$ Min.
- 1.3 Dielectric Withstanding: $600V_{AC}$
- 1.4 Contact Resistance: 20m Max.
- 1.5 Operating Temperature: $-40^{\circ}C$ to $+105^{\circ}C$

2. Materials

- 2.1 Contact Material: Phosphor Bronze
- 2.2 Insulation Material: Polyester, UL 94V-0
B= Nylon 6T Black C= LCP Black
R= Nylon (Halogen Free) Black

Dim.E	NOTE
4.00mm	02~08pins
10.15mm	09~40pins



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15


DATE

.XXX ± 0.10

ANG \pm

照片框

ORDER INFORMATION

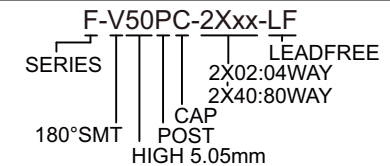

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: 2.54 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR