

MATERIAL

Contact Pin : Phosphar Bronze

SPECIFICATION




Current Rating : 3 AMP

Insulation Resistance : 500MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Withstanding : 600 VAC

Operation Temperature : -40°C to + 105°C

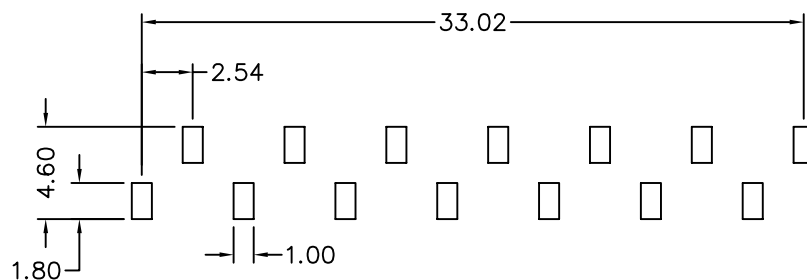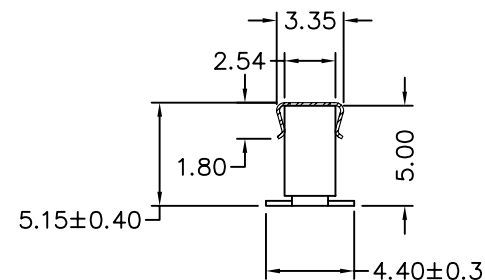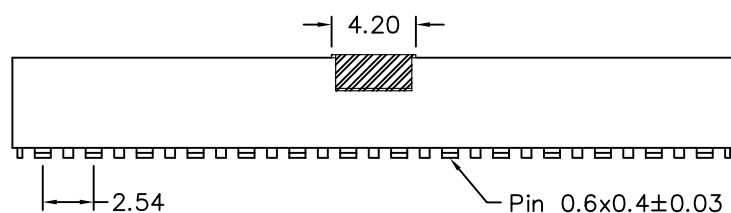

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-V50XC-1X14L-LF
SERIES | CAP | 14 WAY | LEADFREE
180° SMT | NON POST | L TYPE FOOT
HIGH 5.0mm

DESCRIPTION: FEMALE HEADER 2.54*2.54mm SMT TYPE, SINGLE ROW HEIGHT 5.0mm,CAP+TUBE