

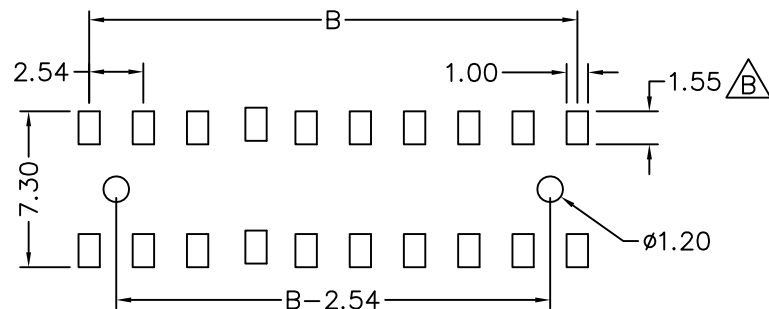
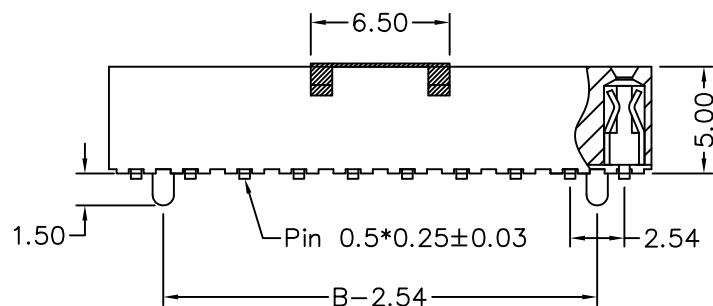


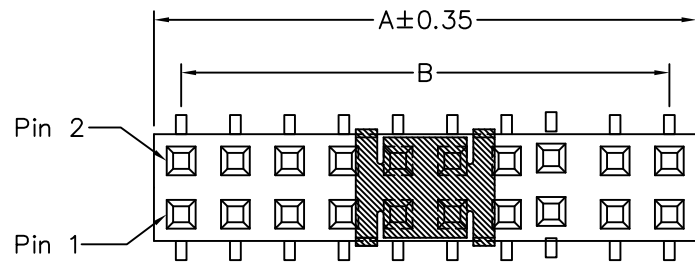

Recommended P.C.B Layout

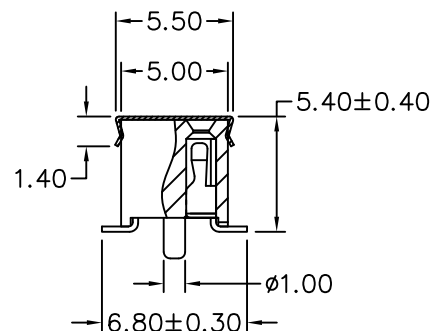

MATERIAL

Insulator: NY6T

Contact Pin : Phosphar Bronze

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000M Ω Min.

Contact Resistance : 20m Ω Max.

Dielectric Voltage : AC 500V for one minute

POLES	DIM A	DIM B	POLES	DIM A	DIM B
			21	53.34	50.80
2	5.08	2.54	22	55.88	53.34
3	7.62	5.08	23	58.42	55.88
4	10.16	7.62	24	60.96	58.42
5	12.70	10.16	25	63.50	60.96
6	15.24	12.70	26	66.04	63.50
7	17.78	15.24	27	68.58	66.04
8	20.32	17.78	28	71.12	68.58
9	22.86	20.32	29	73.66	71.12
10	25.40	22.86	30	76.20	73.66
11	27.94	25.40	31	78.74	76.20
12	30.48	27.94	32	81.28	78.74
13	33.02	30.48	33	83.82	81.28
14	35.56	33.02	34	86.36	83.82
15	38.10	35.56	35	88.90	86.36
16	40.64	38.10	36	91.44	88.90
17	43.18	40.64	37	93.98	91.44
18	45.72	43.18	38	96.52	93.98
19	48.26	45.72	39	99.06	96.52
20	50.80	48.26	40	101.60	99.06

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

F-V52PC-2Xxx-LF
SERIES LEADFREE
180°SMT 2X02:04WAY
HIGH 5.2mm CAP 2X40:80WAY
POST

DESCRIPTION: FEMALE HEADER 2.54*2.54mm SMT TYPE, DUAL ROWS HEIGHT 5.0mm,CAP+T R