
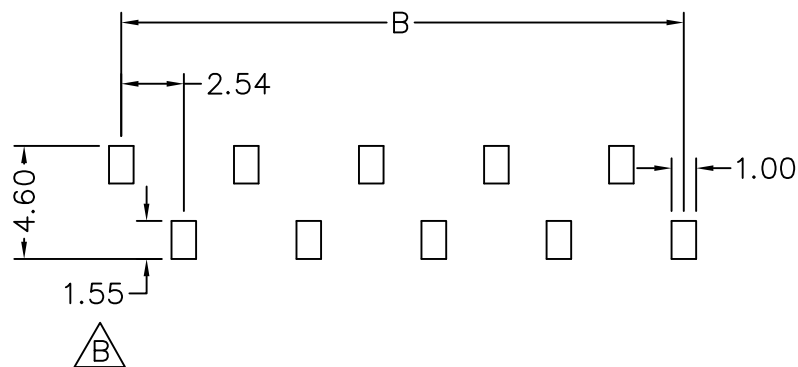

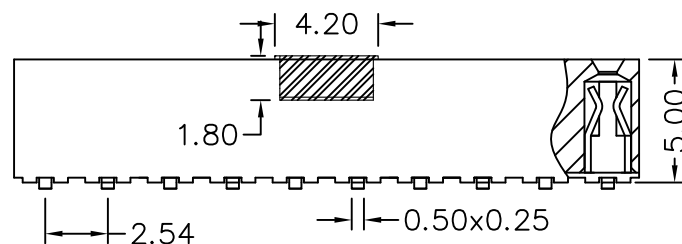


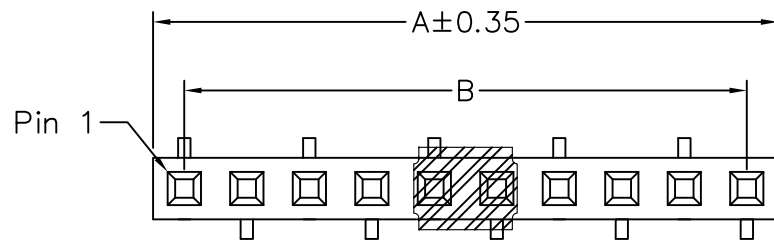

Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphar Bronze

SPECIFICATION

Current Rating : 3 AMP

Insulation Resistance : 500MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Withstanding : 600 VAC

POLES	DIM A	DIM B	POLES	DIM A	DIM B
			21	53.34	50.80
2	5.08	2.54	22	55.88	53.34
3	7.62	5.08	23	58.42	55.88
4	10.16	7.62	24	60.96	58.42
5	12.70	10.16	25	63.50	60.96
6	15.24	12.70	26	66.04	63.50
7	17.78	15.24	27	68.58	66.04
8	20.32	17.78	28	71.12	68.58
9	22.86	20.32	29	73.66	71.12
10	25.40	22.86	30	76.20	73.66
11	27.94	25.40	31	78.74	76.20
12	30.48	27.94	32	81.28	78.74
13	33.02	30.48	33	83.82	81.28
14	35.56	33.02	34	86.36	83.82
15	38.10	35.56	35	88.90	86.36
16	40.64	38.10	36	91.44	88.90
17	43.18	40.64	37	93.98	91.44
18	45.72	43.18	38	96.52	93.98
19	48.26	45.72	39	99.06	96.52
20	50.80	48.26	40	101.60	99.06

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

F-V52XC-1XxxR-LF
SERIES
180°SMT
HIGH 5.2mm
CAP
NON POST
LEADFREE
R TYPE FOOT
1X02:02 WAY
1X40:40 WAY

DESCRIPTION: FEMALE HEADER 2.54*2.54mm SMT TYPE, SINGLE ROW HEIGHT 5.0mm,CAP+T/R