
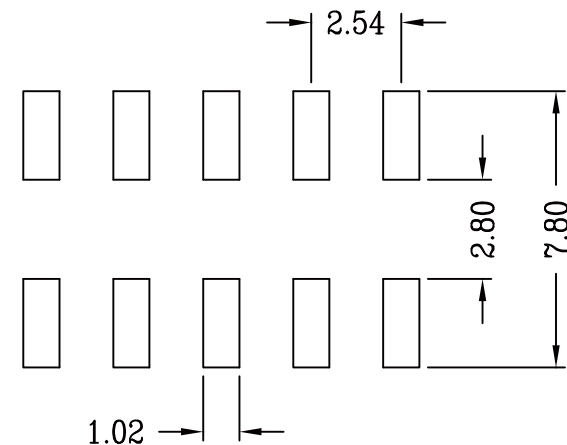
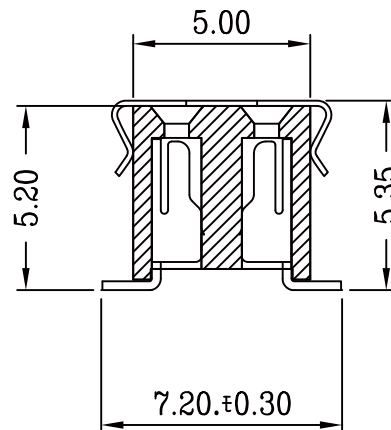
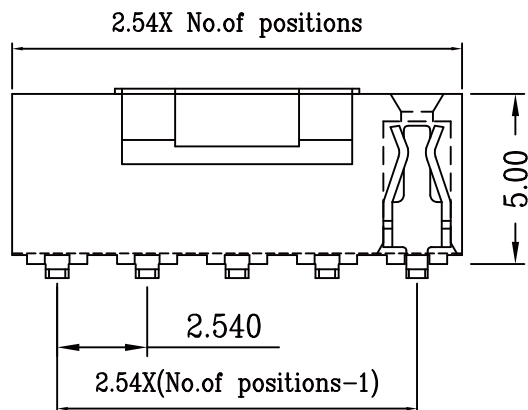


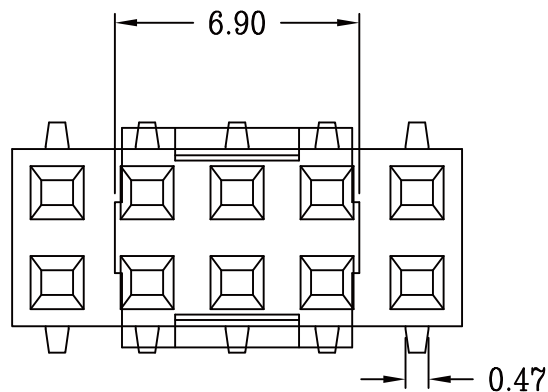

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC

CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: -40°C ~ +105°C

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION


X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

F-V52XCR-2Xxx-LF
SERIES 180°SMT HIGH 5.2mm REEL CAP NON POST
2X03:06WAY
2X40:80WAY
LEADFREE

DESCRIPTION: 2.54mm Female Socket Dual Row SMD type (H=5.2)

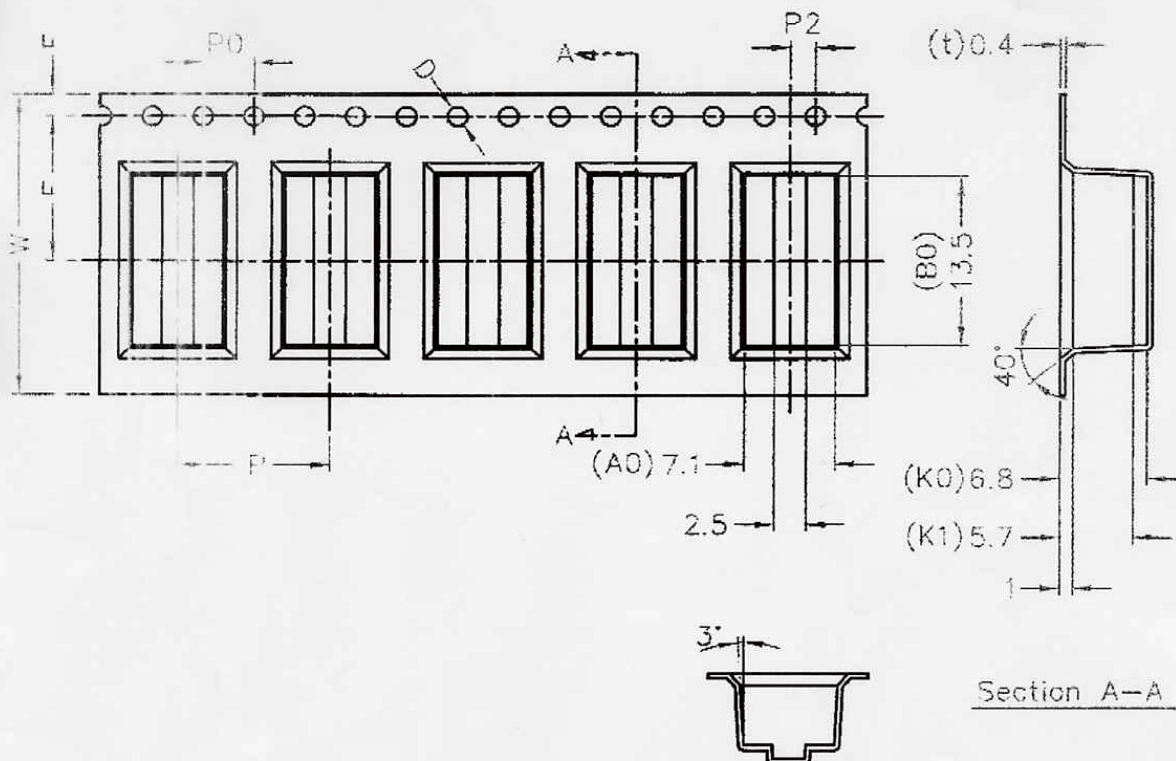

- 1.10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
2. Carrier camber not to exceed 1mm in 100mm.
3. A_0 and B_0 measured on a plane 0.3mm above the bottom of the pocket.
4. K_0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
5. All dimensions meet EIA-481 requirements.
6. Material: Black Anti-static Polystyrene.
7. Thickness: $0.40 \pm 0.05 \text{ mm}$.
8. Packing length per 22" reel : 32 Meters.
9. Component loaded per 13" reel : 800 pcs. (Core 4")

ITEM	W	A ₀	B ₀	K ₀	K ₁	P	F	E	D	D ₁	P ₀	P ₂
DIM	24.0 ^{+0.20} _{-0.20}	7.10 ^{+0.20} _{-0.10}	13.5 ^{+0.20} _{-0.10}	6.80 ^{+0.20} _{-0.10}	5.70 ^{+0.20} _{-0.10}	12.0 ^{+0.10} _{-0.10}	11.50 ^{+0.10} _{-0.10}	1.75 ^{+0.10} _{-0.10}	1.50 ^{+0.10} _{-0.00}	0.00 ^{+0.25} _{-0.00}	4.00 ^{+0.10} _{-0.10}	2.00 ^{+0.10} _{-0.10}
ALTERNATE						問題者明： (Note:)						
客6確認： Customer Approved					確認日期： Date							

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PJECTION



ORDER INFORMATION

F-V52XCR-2Xxx-LF

SERIES
180°SMT
HIGH 5.2mm
REEL
CAP
NON POST
LEADFREE
2X03:06WAY
2X40:80WAY

DESCRIPTION: