

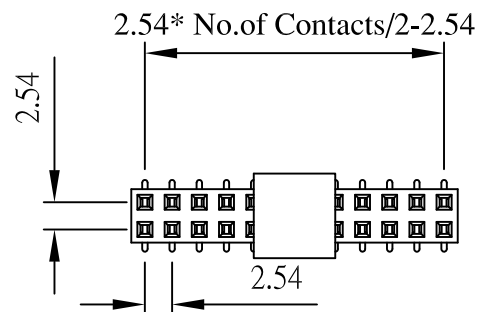
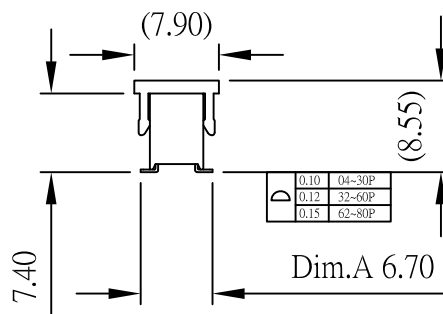


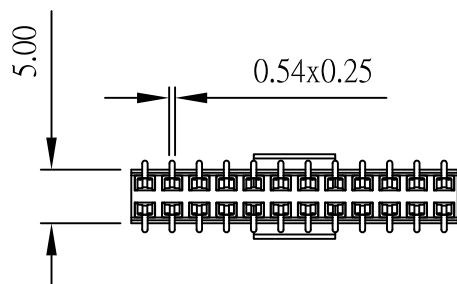


②: 2.54 \* No. of Contacts / 2

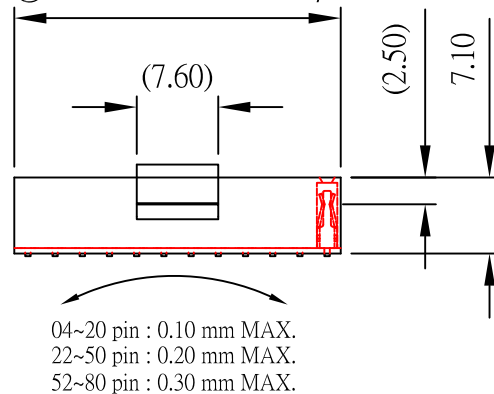

Current Rating and voltage: 3 Amps 250V(r.m.s)  
Insulator Resistance: 5000 Megohms min  
Contact Resistance: 20 m ohms max  
Dielectric Withstanding: 1000 V AC  
Operating Temperature: - 40° ~ +105° C  
Max Processing Temp: 230° C for 60 seconds  
Max Processing Temp: 260° C for 10 seconds  
Contact Material: Phosphor Bronze  
Insulator Material: High Temperature Plastic, UL 94V-0  
Finish: Standard: Gold Flash all over

Recommended P.C. Board

SMD Layout

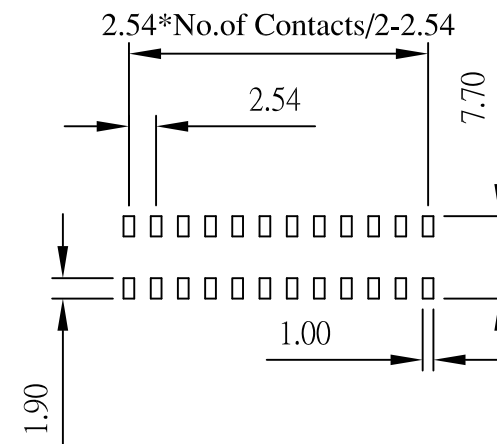

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±

照片框

ORDER INFORMATION

F-V74XC-2Xxx-LF  
SERIES  
180°SMT  
CAP  
NON POST  
HIGH 7.4mm  
LEADFREE  
2X02:04WAY  
2X40:80WAY

DESCRIPTION: