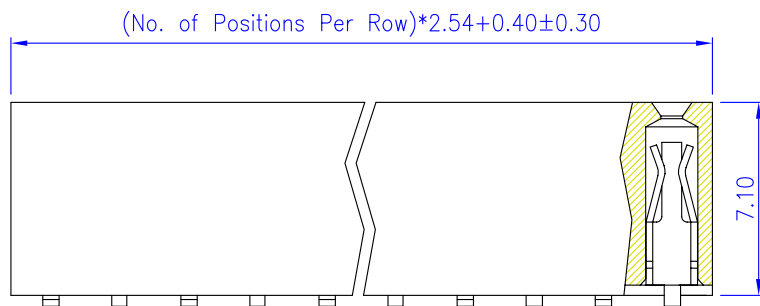
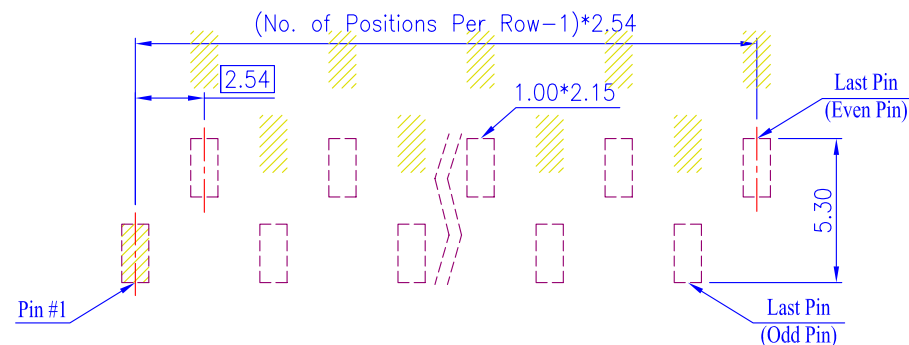
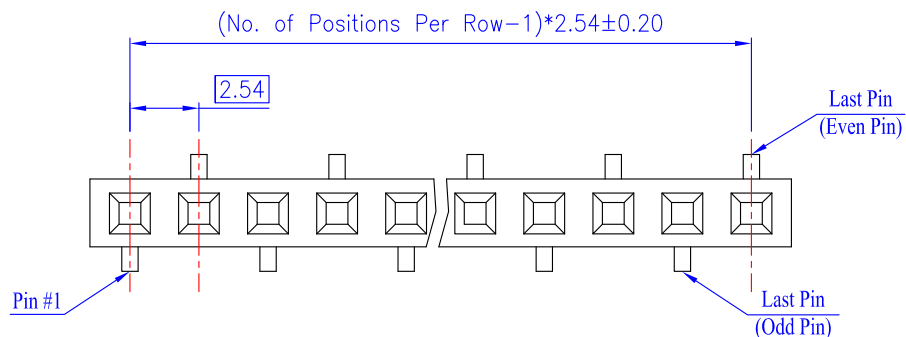


Material and Finish

1. Housing: Nylon 6T (UL94V-0), Black.
2. Terminal: Copper Alloy ($t=0.25\text{mm}$), Gold Plating.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.
4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

1. Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

F-V75X-1XxxL-LF
SERIES
180°SMT
LEADFREE
L TYPE FOOT
1X03:03 WAY
1X40:40 WAY
NON POST
HIGH 7.5mm

DESCRIPTION: 2.54mm Post Header Receptacle PCB Surface Mount Type without Post, Single Row (H=7.10mm)