



Contacts	Dim_A
2P	5.08
3P	7.62
4P	10.66
5P	13.2
6P	15.74
7P	18.28
8P	20.82
9P	23.36
10P	25.9
11P	28.44
12P	30.98
13P	33.52
14P	36.06
15P	38.6
16P	41.14
17P	43.68
18P	46.22
19P	48.76
20P	51.3
21P	53.84
22P	56.38
23P	58.92
24P	61.46
25P	64.0
26P	66.54
27P	69.08
28P	71.62
29P	74.16
30P	76.7
31P	79.24
32P	81.78
33P	84.32
34P	86.86
35P	89.4
36P	91.94
37P	94.48
38P	97.02
39P	99.56
40P	102.1

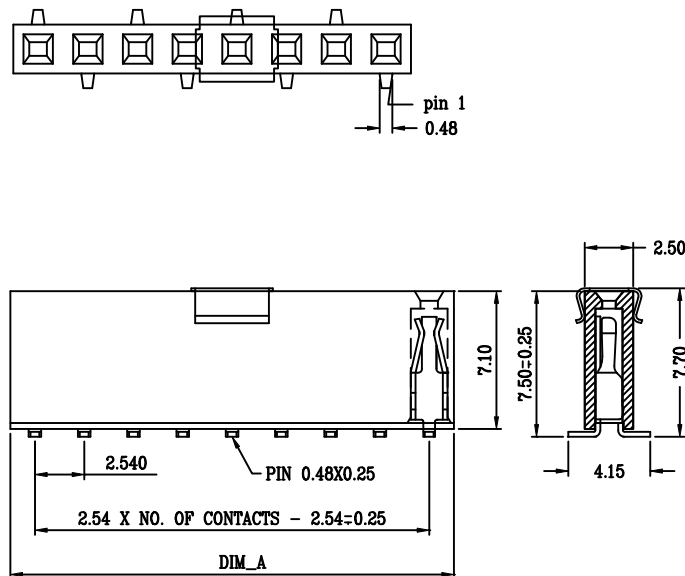

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC

CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: -40℃ ~ +105℃

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0

NYLON 6T

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.35

.XX ± 0.25

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-V75XC-1XxxR-LF
SERIES
180°SMT
HIGH 7.5mm
CAP
NON POST
LEADFREE
R TYPE FOOT
1X03:03 WAY
1X40:40 WAY

DESCRIPTION: 2.54mm Female Socket Single SMD type (H=7.5)