


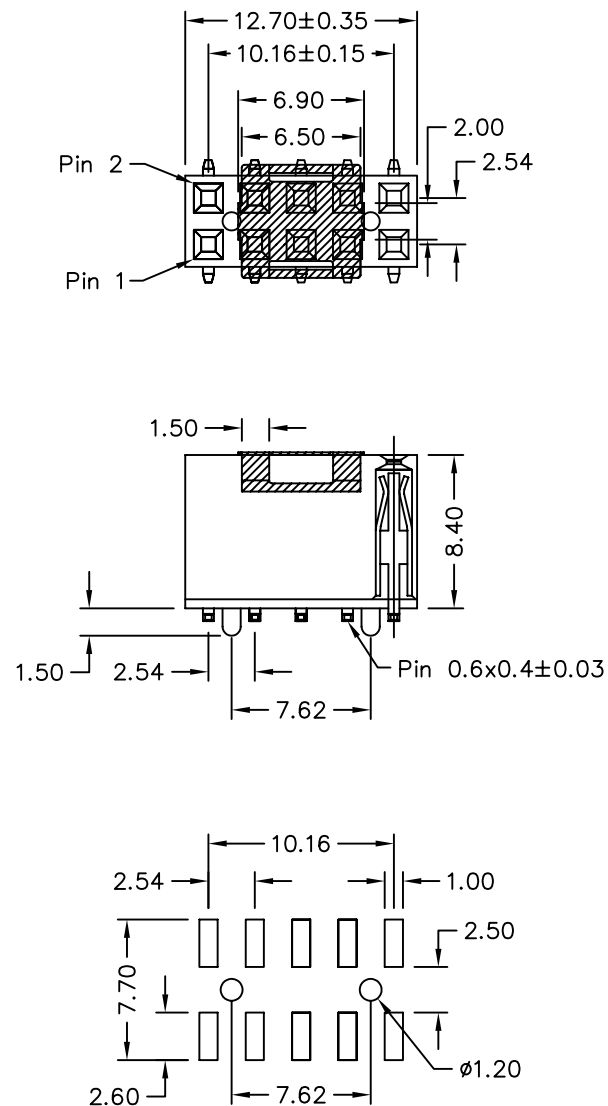

Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze


SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

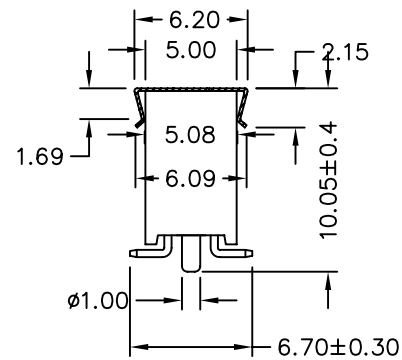

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 3°

PPOJECTION

ORDER INFORMATION

F-V89PC-2X05-LF
SERIES
CAP
POST
HIGH 8.9mm
180°SMT
LEADFREE
10 WAY

DESCRIPTION: