
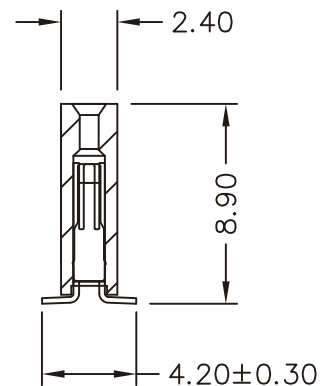


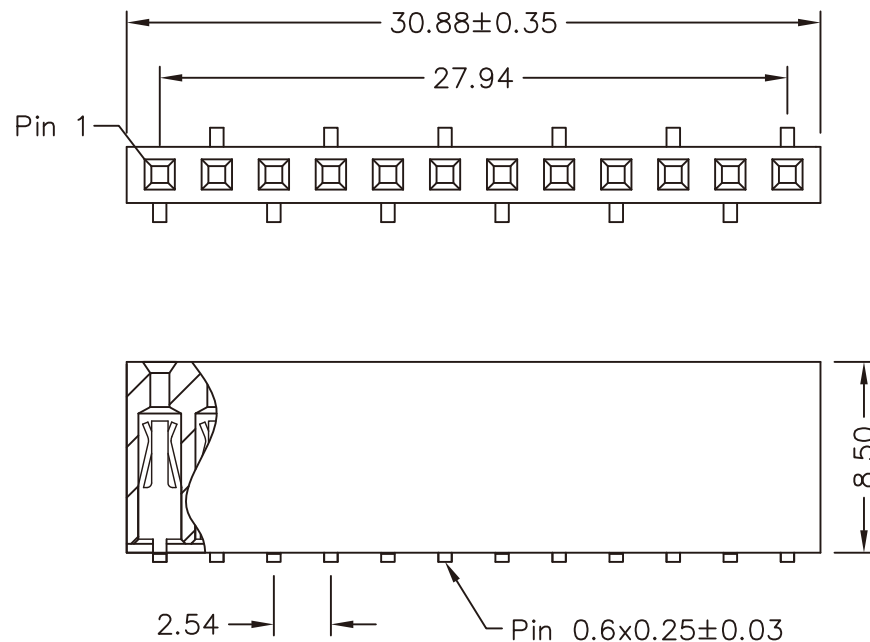


MATERIAL

Insulator: NY6T
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin.
Contact Resistance : 20mΩMax.
Dielectric Voltage : AC 500V for one minute

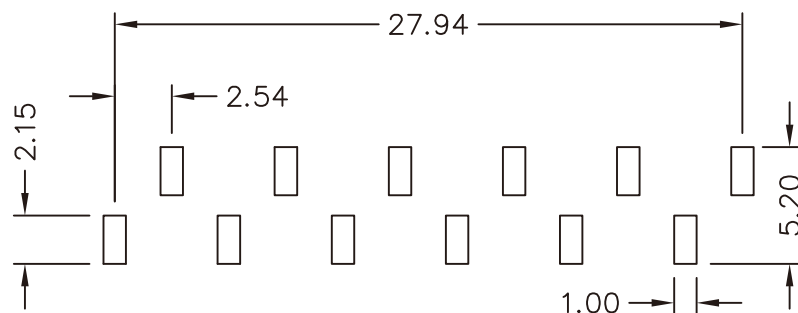

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

F-V89X-1X12L-LF
SERIES
LEADFREE
L TYPE FOOT
12WAY
NON POST
HIGH 8.9mm
180°SMT

DESCRIPTION: FEMALE HEADER 2.54*2.54mm
SMT TYPE TRIPLE CONTACT SINGLE ROW, HEIGHT 8.5mm