
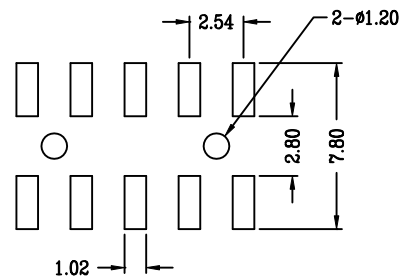
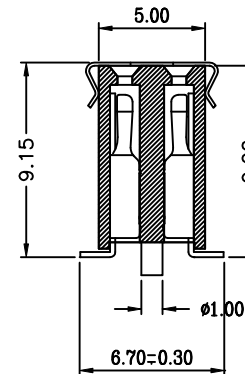



| Contacts | Dim_A |
|----------|-------|
| 2X2P     | 5.08  |
| 2X3P     | 7.62  |
| 2X4P     | 10.66 |
| 2X5P     | 13.2  |
| 2X6P     | 15.74 |
| 2X7P     | 18.28 |
| 2X8P     | 20.82 |
| 2X9P     | 23.36 |
| 2X10P    | 25.9  |
| 2X11P    | 28.44 |
| 2X12P    | 30.98 |
| 2X13P    | 33.52 |
| 2X14P    | 36.06 |
| 2X15P    | 38.6  |
| 2X16P    | 41.14 |
| 2X17P    | 43.68 |
| 2X18P    | 46.22 |
| 2X19P    | 48.76 |
| 2X20P    | 51.3  |
| 2X21P    | 53.84 |
| 2X22P    | 56.38 |
| 2X23P    | 58.92 |
| 2X24P    | 61.46 |
| 2X25P    | 64.0  |
| 2X26P    | 66.54 |
| 2X27P    | 69.08 |
| 2X28P    | 71.62 |
| 2X29P    | 74.16 |
| 2X30P    | 76.7  |
| 2X31P    | 79.24 |
| 2X32P    | 81.78 |
| 2X33P    | 84.32 |
| 2X34P    | 86.86 |
| 2X35P    | 89.4  |
| 2X36P    | 91.94 |
| 2X37P    | 94.48 |
| 2X38P    | 97.02 |
| 2X39P    | 99.56 |
| 2X40P    | 102.1 |



RECOMMENDED P.C.B LAYOUT

#### SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC

CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: -40℃ ~ +105℃

#### MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0  
NYLON 6T

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.35

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.05

ANG ±

SIZE A4

PPOJECTION

照片框

#### ORDER INFORMATION

F-V90PC-2Xxx-LF  
 SERIES 180°SMT HIGH 9.0mm CAP POST  
 LEADFREE  
 2X03:06WAY  
 2X40:80WAY

DESCRIPTION: 2.54mm Female Socket Dual Row SMD type (H=9.0)

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com