

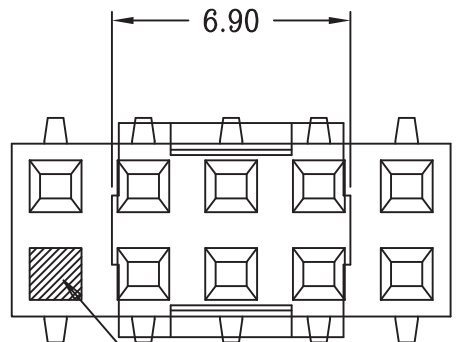


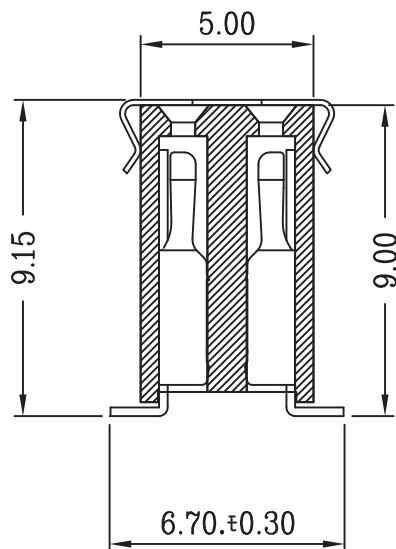

without pin

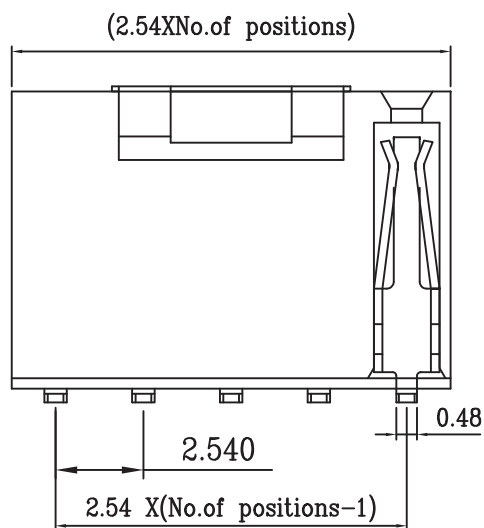

SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC


CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: -40℃ ~ +105℃

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

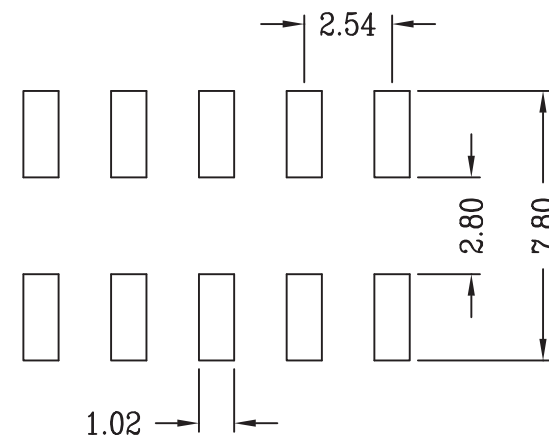

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

F-V90XC-2XxxE2-LF
SERIES | 180°SMT | HIGH 9.0mm | CAP | NON POST | LEADFREE | EMPTY #2
2X02:04 WAY
2X40:80 WAY

DESCRIPTION: 2.54mm Female Socket Dual Row SMD type (H=9.0)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±