
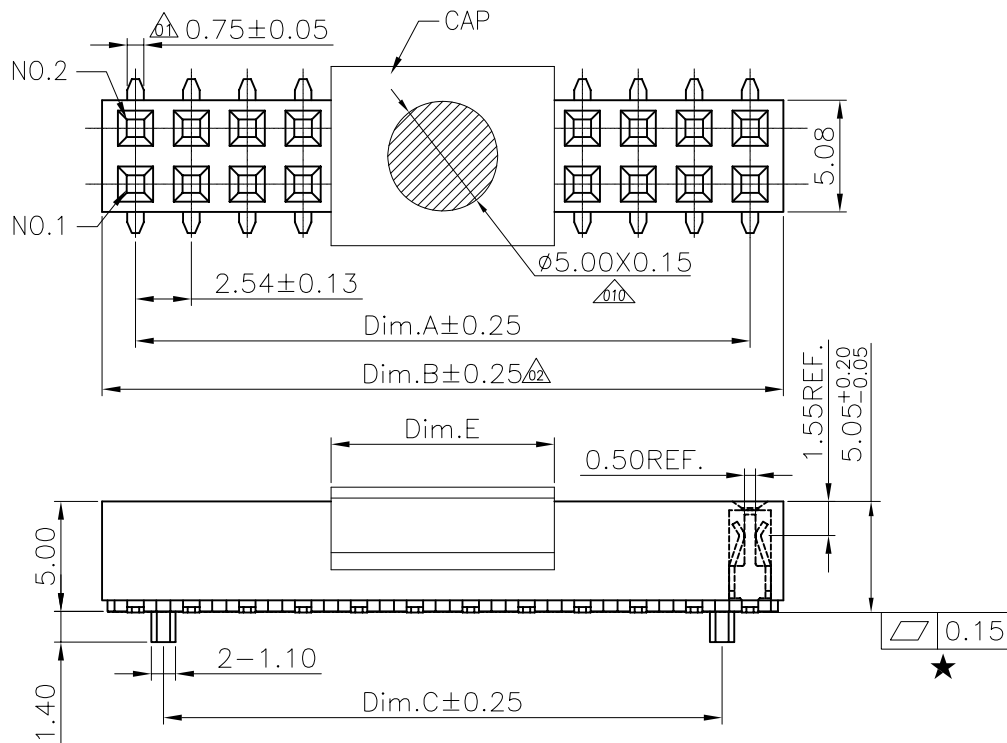


RECOMMENDED P.C.B LAYOUT
FOR BOTTOM ENTRY
(Tolerance:±0.05)




1. Specifications

- 1.1 Current Rating: 3Amp
- 1.2 Insulation Resistance: 1000MΩ Min.
- 1.3 Dielectric Withstanding: 600VQAC
- 1.4 Contact Resistance: 20mΩ Max.
- 1.5 Operating Temperature: -40°C to +105°C

2. Materials

- 2.1 Contact Material: Phosphor Bronze
- 2.2 Insulation Material: Polyester, UL 94V-0
- B= Nylon 6T Black C= LCP Black
- R= Nylon (Halogen Free) Black

Dim.E	NOTE
4.00mm	02~08pins
10.15mm	09~40pins



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-Z50PC-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
CAP POST
HIGH 5.05mm
BOTTOM ENTRY SMT

DESCRIPTION: 2.54 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR