
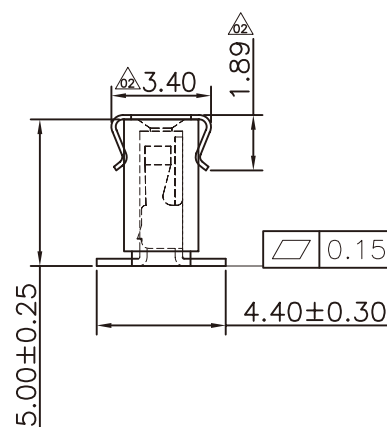

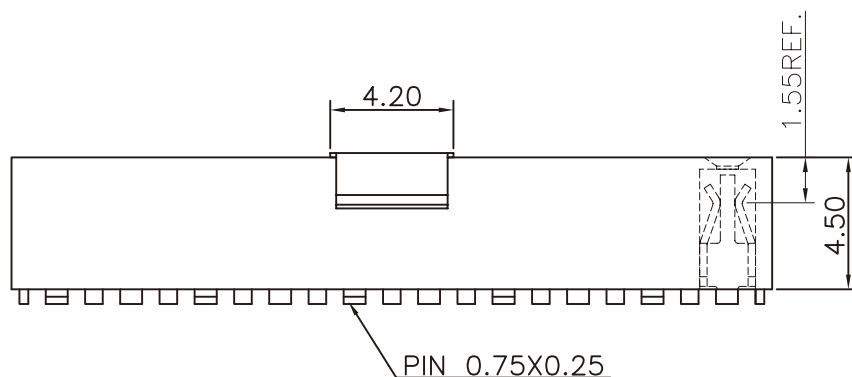


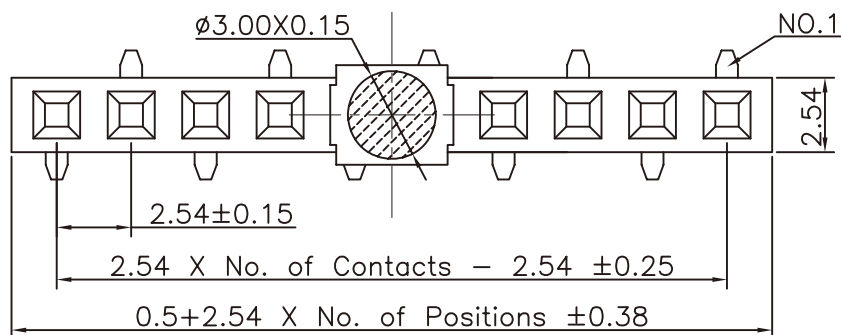

Specifications

Current Rating:3Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:600VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C


Materials

Contact Material:Phosphor Bronze

Insulator Material:High Temperature

Thermoplastic,UL 94V-0 Nylon 6T(Halogen Free)
or the equivalent material

Recommended P.C.Board Bottom Entry Layout

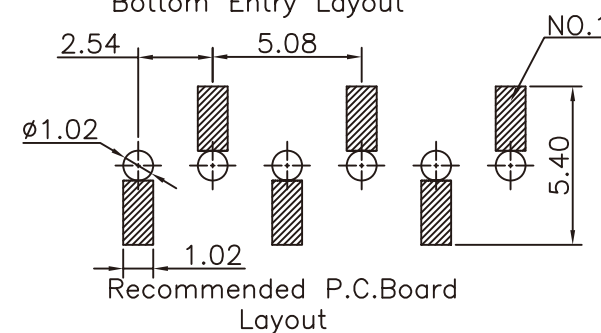

Recommended P.C.Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION



ORDER INFORMATION

F-Z50XC-1XxxL-LF
SERIES
BOTTOM ENTRY SMT
HIGH 5.0mm
CAP
NON POST
LEADFREE
L TYPE FOOT
1X02:02WAY
1X40:40WAY

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW SMT TYPE CONNECTOR