
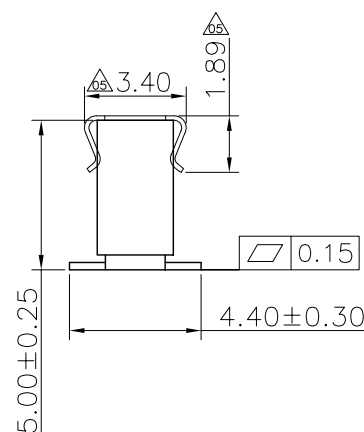

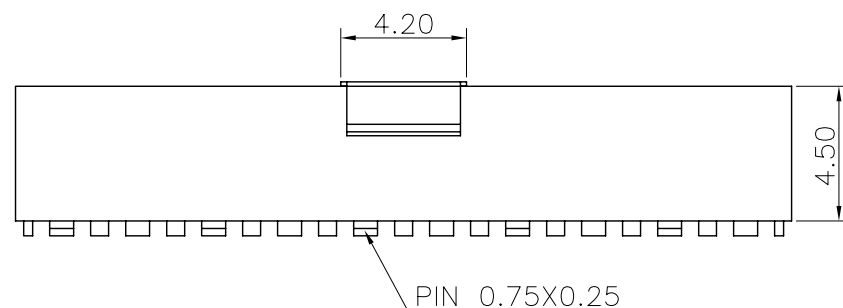


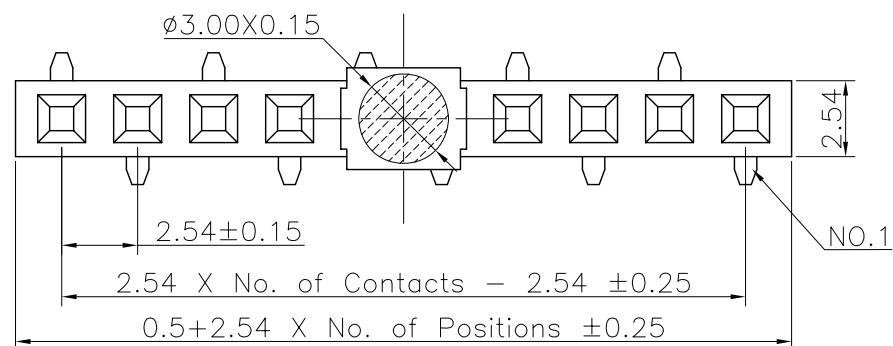

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding Voltage: 600VAC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulator Material: High Temperature

Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free)
or the equivalent material

Recommended P.C.Board Bottom Entry Layout

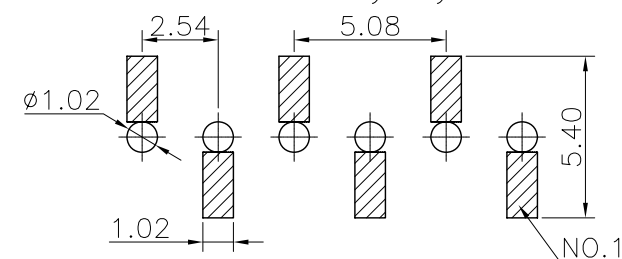

Recommended P.C.Board Layout (Tolerance: ±0.05)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-Z50XC-1XxxR-LF
SERIES
BOTTOM ENTRY SMT
HIGH 5.0mm
LEADFREE
R TYPE FOOT
1X02:02WAY
1X40:40WAY
CAP
NON POST

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW SMT TYPE CONNECTOR