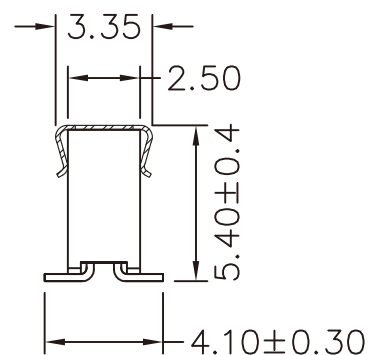
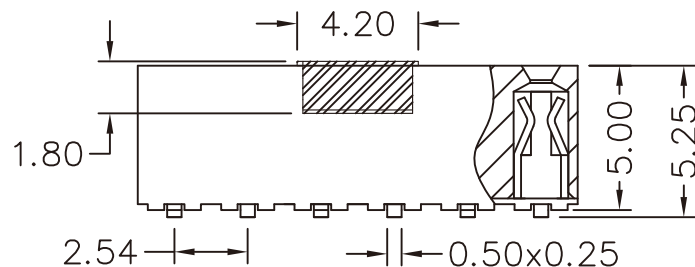
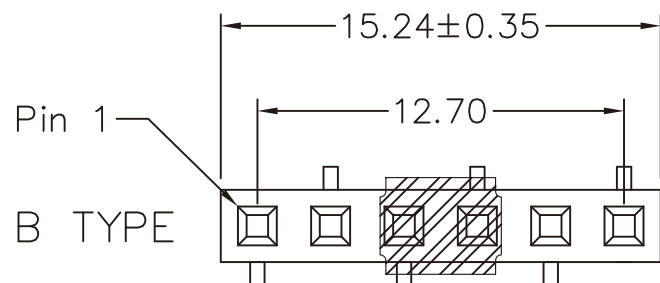


Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphar Bronze

SPECIFICATION

Current Rating : 3 AMP

Insulation Resistance : 500M Ω Min.

Contact Resistance : 20m Ω Max.

Dielectric Withstanding : 600 VAC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

F-Z52XC-1X06L-LF
SERIES | CAP 06 WAY | LEADFREE
L TYPE FOOT
BOTTOM ENTRY SMT | NON POST
HIGH 5.25mm

DESCRIPTION: