
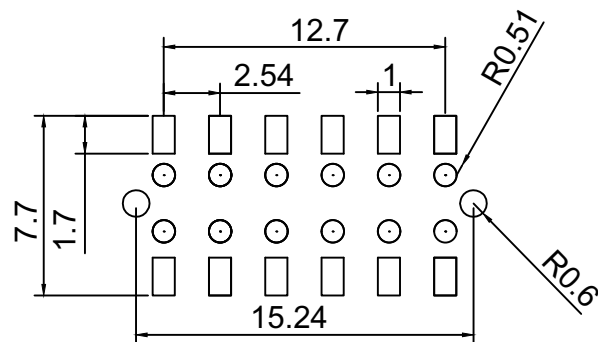

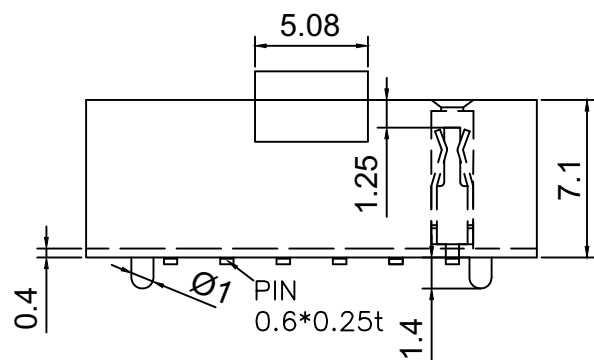


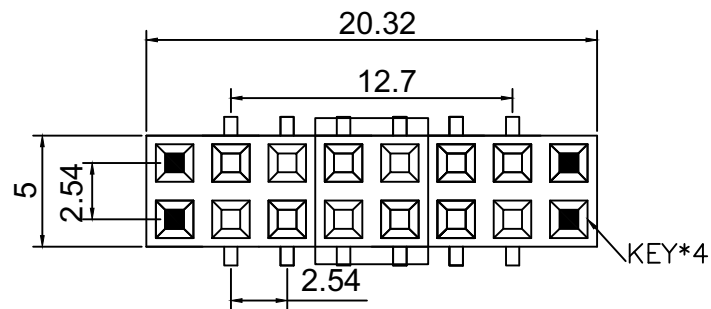

RECOMMENDED P.C.B. LAYOUT

specifications

current rating:3amp
voltage rating:250V ac max
insulator resistance:5000 M ohms min.
contact resistance:20 m ohms max.
dielectric withstanding:500v ac for one minute
operating temperature:-40°C--+105°C(ny9t)
max.processing temp:245±5°C for 3-5seconds(ny9t)

contact material:phosphor bronze
insulator material:ny9t
color:black
finish:gold flash
packing:bag/tray

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ±

照片框

ORDER INFORMATION

F-Z75PC-2X08K4C-LF
SERIES
BOTTOM ENTRY
CAP POST
HIGH 7.5mm
16 WAY
KEY#4
LEADFREE

DESCRIPTION: