

SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC





CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: -25°C ~ +85°C

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

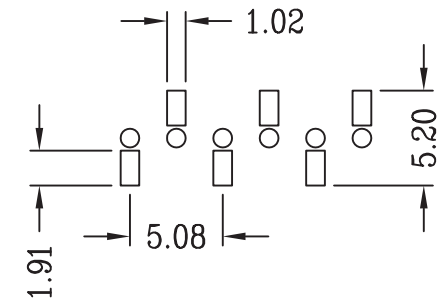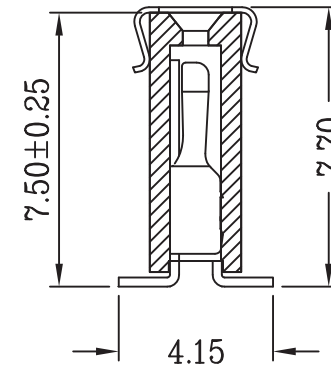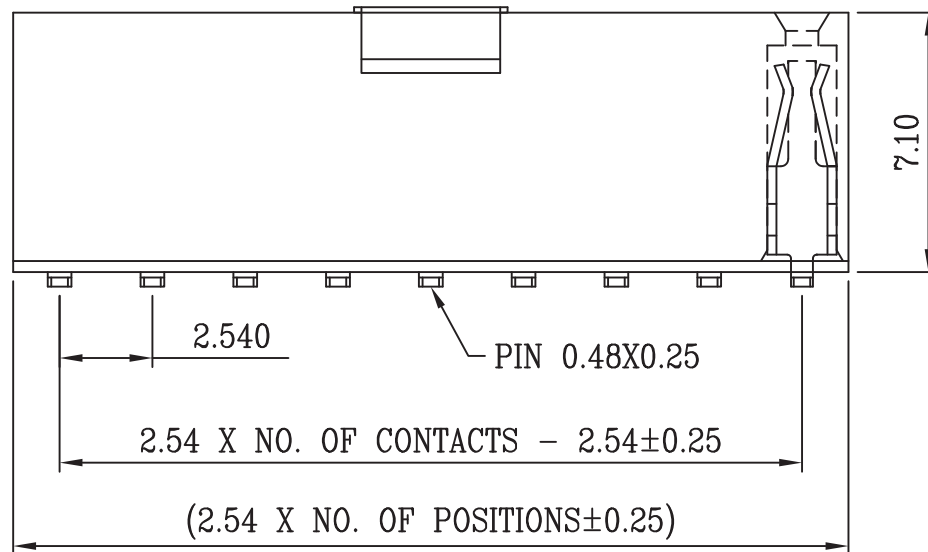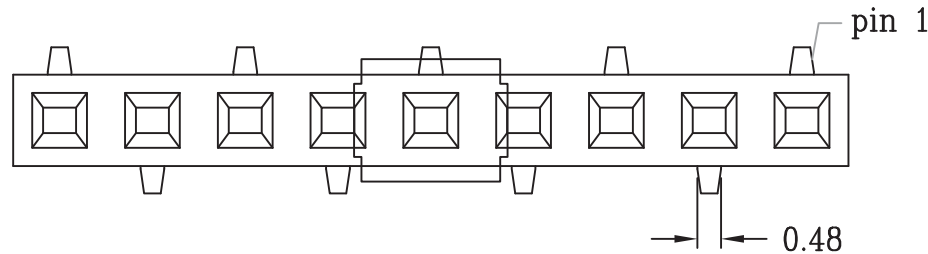

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

F-Z75XC-1XxxL-LF
SERIES
BOTTOM ENTRY SMT
HIGH 7.5mm
CAP
NON POST
LEADFREE
L TYPE FOOT
1X02:02WAY
1X40:40WAY

DESCRIPTION: 2.54mm Female Socket Single SMD type (H=7.5)