

Specifications:

Current rating: 3.0A AC, DC

Voltage rating: 250V AC, DC

Contact resistance: 20m ohm max.

Insulation resistance: 1000M ohm min.

Withstanding voltage: 600V AC/minute

Operating Temperature range: -40°C to +105°C

Material:

Insulator: High Temp Plastic (Nylon 6T UL94V-0)


Standard Color:Black

Contact: Phosphor Bronze

Finish: Glod Plated

Dimension :

Contacts	DIM:(mm)		Contacts	DIM:(mm)		Contacts	DIM:(mm)		Contacts	DIM:(mm)	
	A	B		A	B		A	B		A	B
2	6.08	2.54	12	31.48	27.94	22	56.88	53.34	32	82.28	78.74
3	8.62	5.08	13	34.02	30.48	23	59.42	55.88	33	84.82	81.28
4	11.16	7.62	14	36.56	33.02	24	61.96	58.42	34	87.36	83.82
5	13.70	10.16	15	39.10	35.56	25	64.50	60.96	35	89.90	86.36
6	16.24	12.70	16	41.64	38.10	26	67.04	63.50	36	92.44	88.90
7	18.78	15.24	17	44.18	40.64	27	69.58	66.04	37	94.98	91.44
8	21.32	17.78	18	46.72	43.18	28	72.12	68.58	38	97.52	93.98
9	23.86	20.32	19	49.26	45.72	29	74.66	71.12	39	100.06	96.52
10	26.40	22.86	20	51.80	48.26	30	77.20	73.66	40	102.60	99.06
11	28.94	25.40	21	54.34	50.80	31	79.74	76.20			

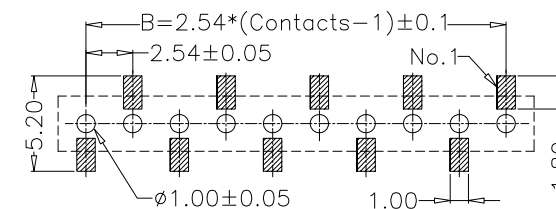

P.C.B. LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

F-Z85X-1XxxL-LF

SERIES

LEADFREE

L TYPE FOOT

1X02:02WAY

1X40:40WAY

NON POST

HIGH 8.5mm

BOTTOM ENTRY SMT

DESCRIPTION: 2.54mm PCB Socket 8.5mm Height Single Row SMD Type