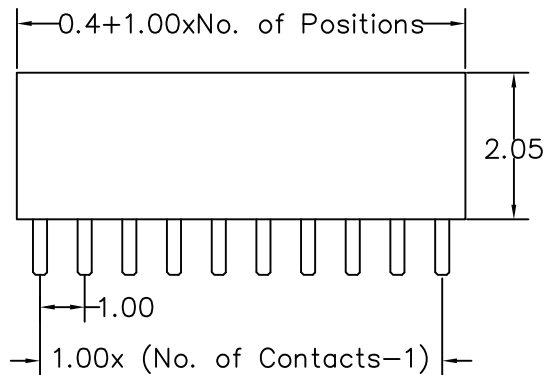


RECOMMENDED P.C.B LAYOUT

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION


CURRENT: 1A

OPERATING TEMPERATURE: -40°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

WITHSTAND VOLTAGE : 500 V AC MIN



CONTACTS

1X3

1X4

1X5

1X6

1X7

1X9

1X10

1X14

1X15

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

F10-D20-1Xxx-LF
SERIES | LEADFREE
1X03:03WAY
1X15:15WAY
HIGH 2.05mm
DIP 180°

DESCRIPTION: