

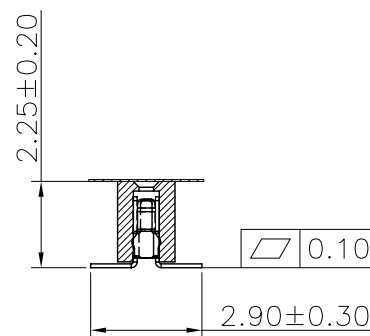
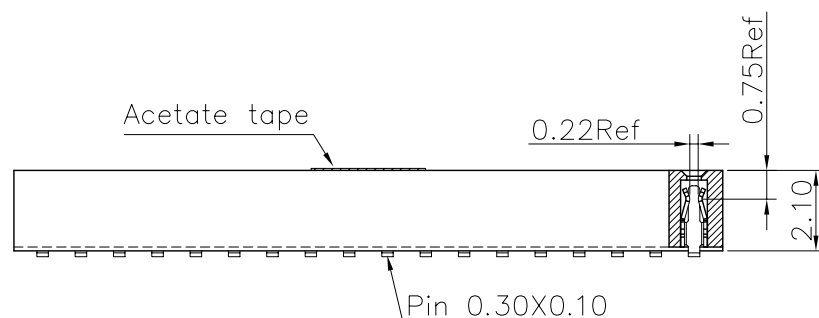


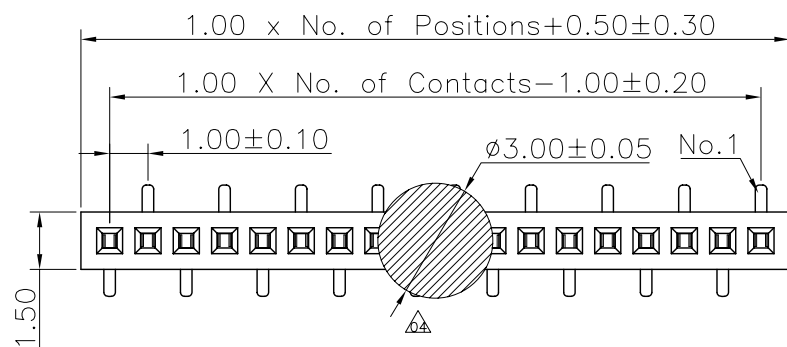

Recommended P.C.Board
Layout
(Tolerance: ±0.05)

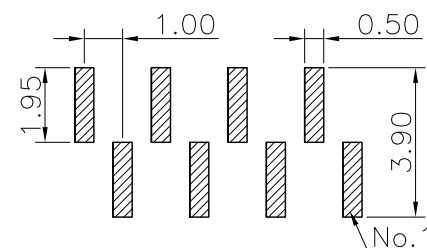

Specifications
Current Rating: 1Amp
Insulation Resistance: 1000MΩMin.
Dielectric Withstanding Voltage: 300VAC
Contact Resistance: 20mΩMax.
Operating Temperature: -40°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F10-V22XC-1XxxL-LF

SERIES
180°SMT
HIGH 2.25mm
CAP
NON POST
LEADFREE
L TYPE FOOT
1X02:02 WAY
1X40:40 WAY

DESCRIPTION: 1.00 FEMALE HEADER SINGLE ROW SMT TYPE CONNECTOR