
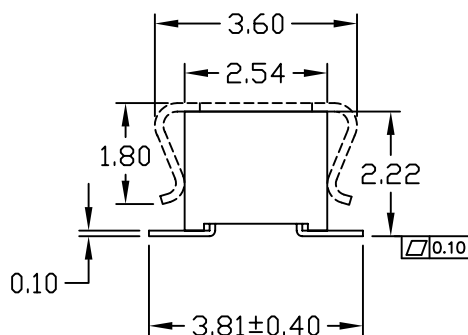
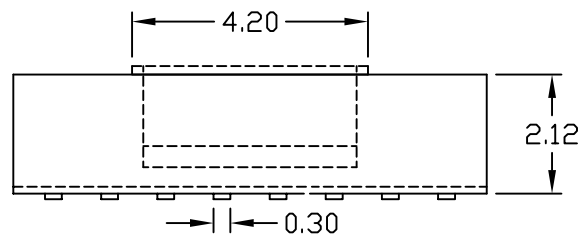


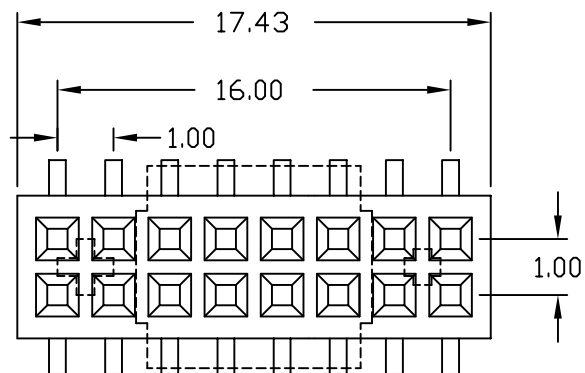

SPECIFICATIONS

Current Rating:	1 Amp
Insulator resistance:	5000 Megohms Min.
Contact resistance:	20 m ohm Max.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-40° ~ +105°C
Contact Material:	Phosphor Bronze.
Insulator Material:	Thermoplastic,UL 94V-0(L.C.P)
	Color : Black

Finish: Gold plated


◎ Standard : Gold flash all over nickel

Retention Force : 200 g Min Per Pin.

Insertion Force : 150 g Min Per Pin.

Separator Force : 25 g Min Per Pin.

Recommended PCB Layout
(PCB TOLERANCE .±0.05)

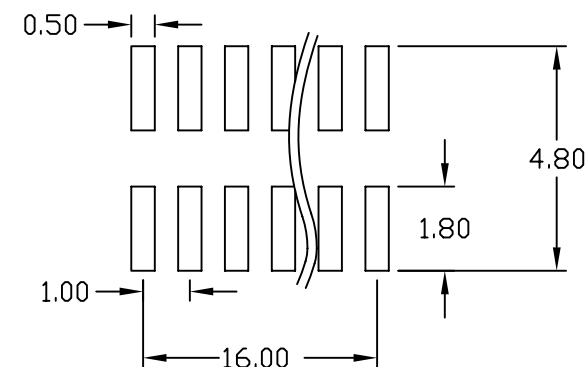

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F10-V22XC-2X17-LF
SERIES CAP 34 WAY LEADFREE
NON POST
HIGH 2.22mm
180° SMT

DESCRIPTION: 1.0X1.0mm SMD SOCKET