




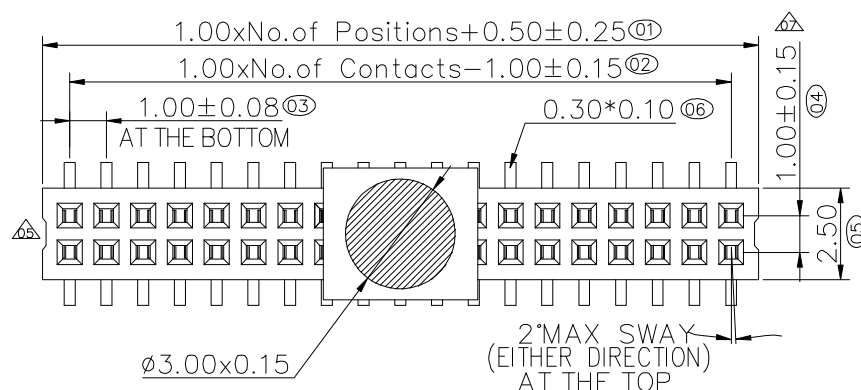


Dim.D	Dim.C	NOTE
3.00mm	3.85mm	03 Pin
4.20mm	3.40mm	04~40Pin

acetate tape



注：02PIN 使用圓形膠布只適合卷裝，
管裝使用會貼在一起

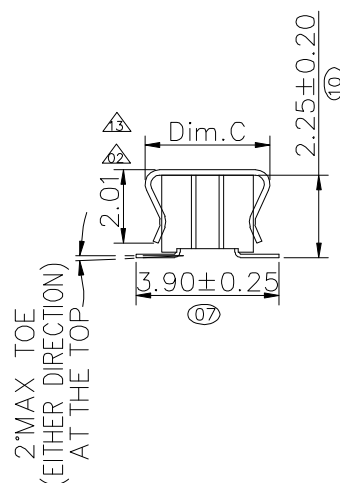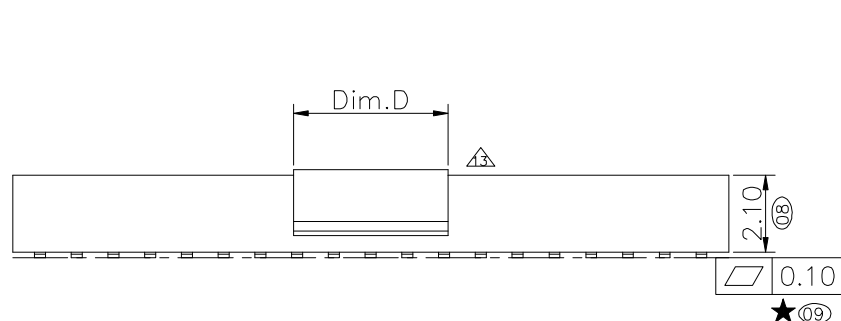

Specifications

Current Rating: 1.0Amp

Insulation Resistance: 1000MΩMin.

Dielectric Withstanding Voltage: 300VAC

Contact Resistance: 20mΩMax.

Operating Temperature: -40°C to +105°C

Max Process Temp: 230°C for 30~60 sec.


Materials

Contact Material: Phosphor Bronze

Insulator Material: High Temperature

Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P.C.Board
Layout For Top Entry
(Tolerance: ±0.05)

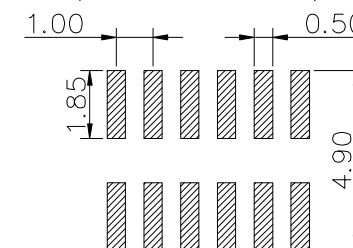

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F10-V22XC-2Xxx-LF
SERIES 180°SMT LEADFREE
2X02:04WAY
2X40:80WAY
CAP
NON POST
HIGH 2.25mm

DESCRIPTION: 1.00 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR