


SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

1.0 X (No. of Contacts/2-1)

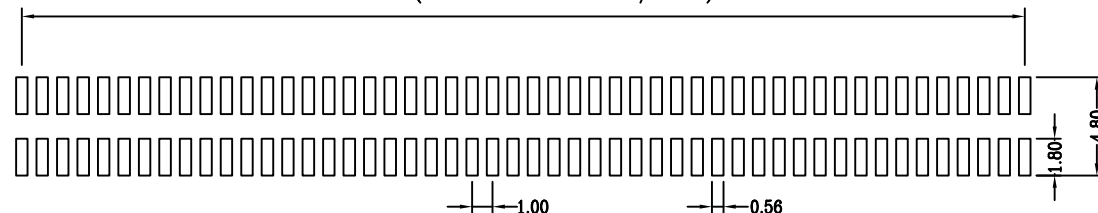

Recommended P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



PPOJECTION

照片框


ORDER INFORMATION

F10-V22XCR-2Xxx-LF
SERIES | LEADFREE
2X03:06WAY
2X50:100WAY
180°SMT | REEL
HIGH 2.2mm | CAP
NON POST

DESCRIPTION: 1.0mm Female Socket Dual Row H=2.2mm type

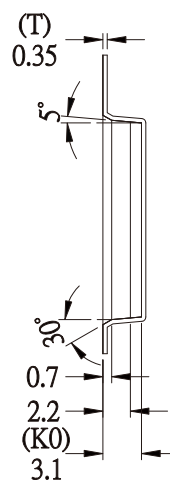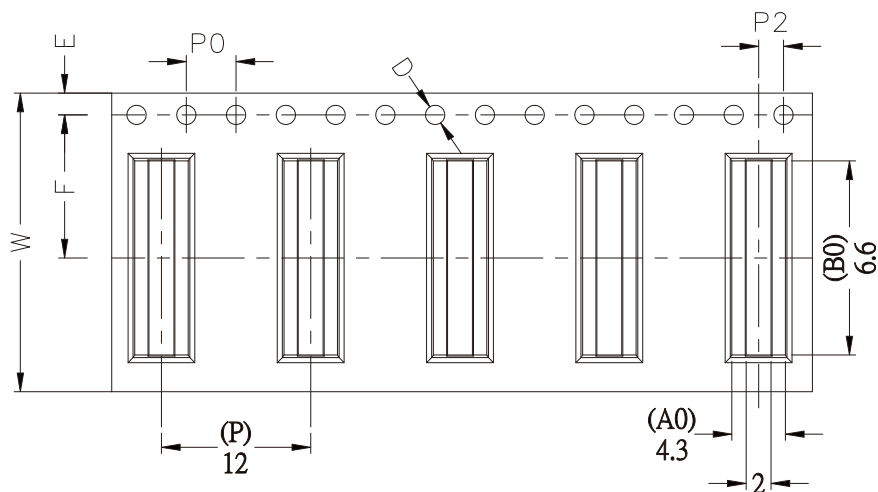

SECTION A-A



- 1.10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
- 2.Carrier camber not to exceed 1mm in 100mm.
3. A_0 and B_0 measured on a plane 0.3mm above the bottom of the pocket.
4. K_0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- 5.All dimensions meet EIA-481-C requirements.
- 6.Material: Black Anti-static Polystyrene.
- 7.Thickness: $0.35 \pm 0.05 \text{ mm}$.
- 8.Packing length per 22" reel : 64.5 Meters.
- 9.Component loaded per 13" reel : 2800 pcs. (Core 4")

ITEM	W	A_0	B_0	K_0	K_1	P	F	E	D	D_1	P_0	P_2
DIM	16.0 ^{+0.30} _{-0.30}	4.30 ^{+0.20} _{-0.10}	6.6 ^{+0.20} _{-0.10}	3.10 ^{+0.20} _{-0.10}	0.00 ^{+0.20} _{-0.10}	12.0 ^{+0.10} _{-0.10}	7.50 ^{+0.10} _{-0.10}	1.75 ^{+0.10} _{-0.10}	1.50 ^{+0.10} _{-0.00}	0.00 ^{+0.25} _{-0.00}	4.00 ^{+0.10} _{-0.10}	2.00 ^{+0.10} _{-0.10}

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

F10-V22XCR-2Xxx-LF

SERIES
180°SMT
HIGH 2.2mm
REEL
CAP
NON POST
LEADFREE
2X03:06WAY
2X50:100WAY

DESCRIPTION: REEL 2X06 P