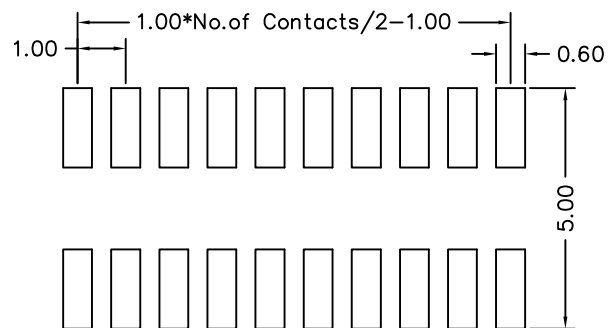
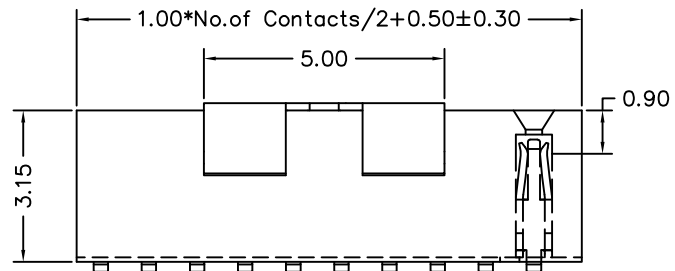
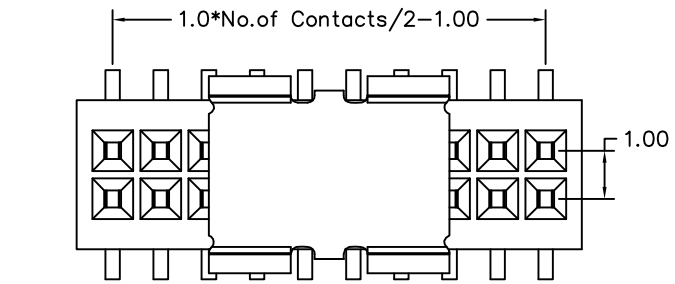


MATERIAL

Insulation : Polyester,UL 94V-0

Standard:L.C.P

Contact: Phosphor Bronze

SPECIFICATION

Current Rating : 1 Amps

Insulation Resistance : 1000Megohms min

Contact Resistance : 20m ohms max

Dielectric Withstanding : 300V AC

Operating Temperature: -40°~+125°C

Recommended P.C.Board SMD Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

F10-V31XC-2Xxx-LF
SERIES 180°SMT HIGH 3.15mm
LEADFREE 2X02:04 WAY 2X50:100 WAY
CAP POST

DESCRIPTION: FEMALE HEADER 1.0*1.0mm
SMT TYPE, DUAL ROWS HEIGHT 3.15mm,CAP+TUBE