


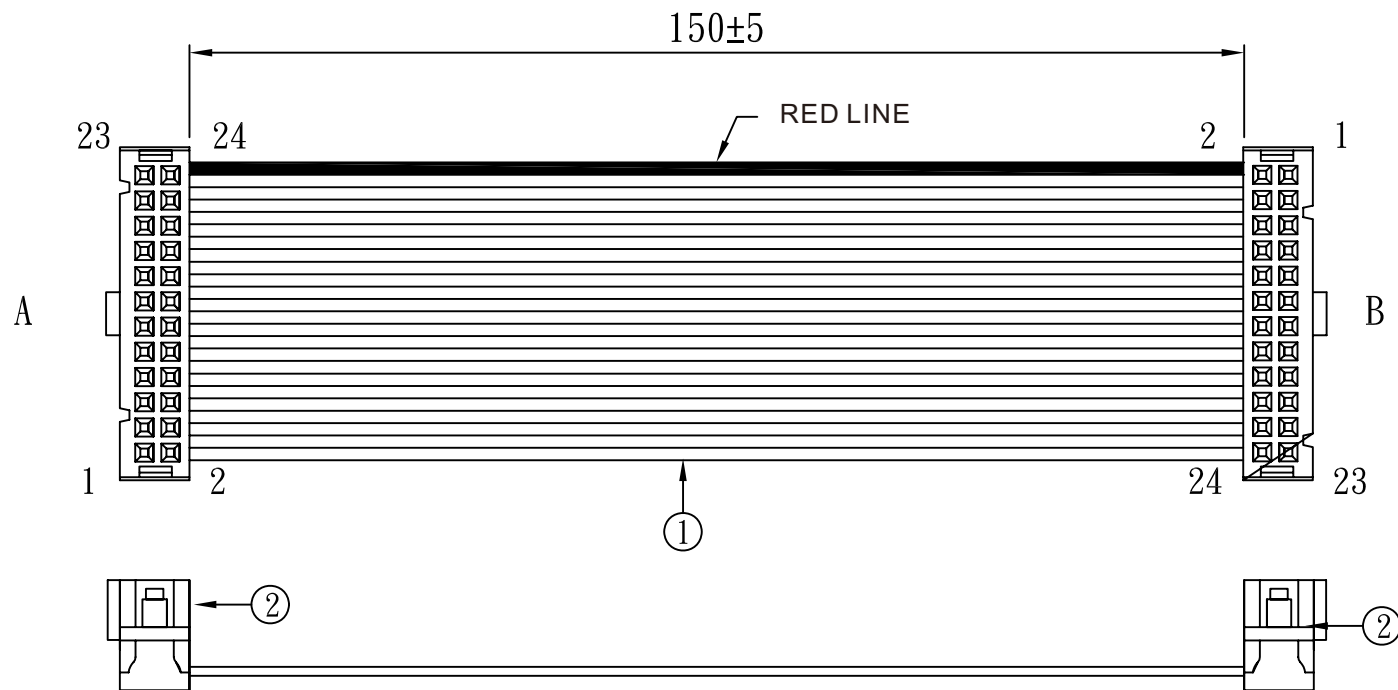

A	COLOR	B
24	RED	1
23	GRAY	2
22	GRAY	3
.	.	.
.	.	.
.	.	.
3	GRAY	22
2	GRAY	23
1	GRAY	24

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL/CSA 2651#28 Gray Flat cable	1pcs	
		24P PH:1.27		
2	DIP:	24P(Two-Parts)BLACK PH:2.54	2pcs	
3				
4				
5				
6				
7				
8				

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F2X2-2424F2-F15C-LF

SERIES

LEADFREE

150mm

FEMALE TO FEMALE

1-X
24 TO 24 WAY

DESCRIPTION: