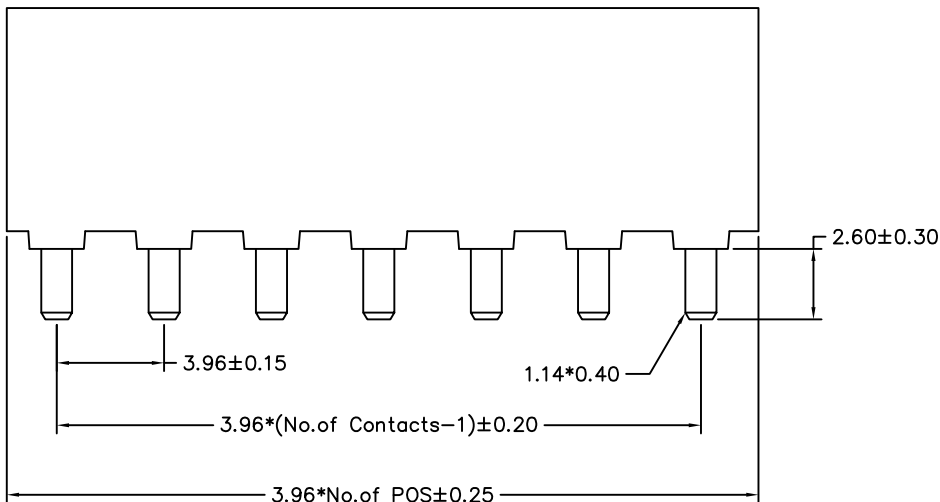
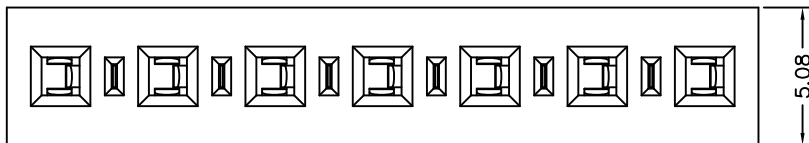


NOTES:

1. Specifications:

Current Rating: 7.9Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding: 1000V AC


Contact Resistance: 30m Ω Max.

Operating Temperature: -40°C to +105°C

2. MATERIAL:

Contact Material: Phosphor Bronze

Insulator Material: Polyester UL94V-0
LCP

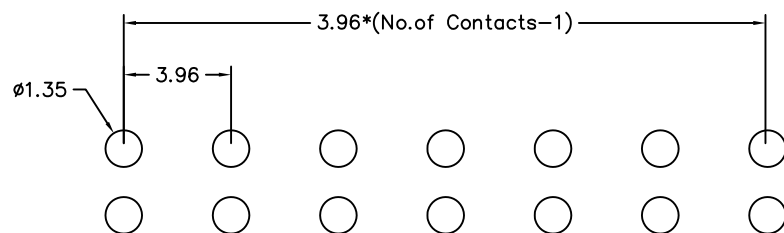

Recommended P.C.B. Layout

Tolerance: ± 0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

F39-D89-1XxxB-LF
SERIES | LEADFREE
DIP 180° | BOTH TAIL
1X02:02WAY
1X24:24WAY
HIGH 8.89mm

DESCRIPTION: 3.96 PITCH POWER ,SINGLE ROW HEIGHT 8.9mm,SOCKETS S/T TUBE